

**SPECIFICATION
OF
LCD MODULE**

MODULE NO.: HL057T13R-01

Customer Approval:

☐ **Accept**

☐ **Reject**

	SIGNATURE	DATE
PREPARED BY		
CHECKED BY		
APPROVED BY		

DOCUMENT REVISION HISTORY


Sample Version	Doc. Version	DATE	DESCRIPTION	CHECKED BY
0001	A0	2021-08-29	First Release.	

1. MECHANICAL SPECIFICATIONS:


ITEM	SPECIFICATION	UNIT
OUTLINE DIMENSIONS	127 (W) X98.43(H) X5.85(D)	mm
ACTIVEAREA	115.2 (W) X86.4(H)	mm
DISPLAY SIZE	5.7	inch
DOT PITCH	0.18mmX0.18mm	mm
NUMBER OF DOTS	640* (RGB) *480	-
DRIVER IC	JD9168	-
LCD TYPE	TFT(65K/262K) TRANSMISSIVE	-
BACKLIGHT TYPE	LED White	-
VIEWING DIRECTION	FREE	-

***See attached drawing for details.**

2.BLOCK DIAGRAM:

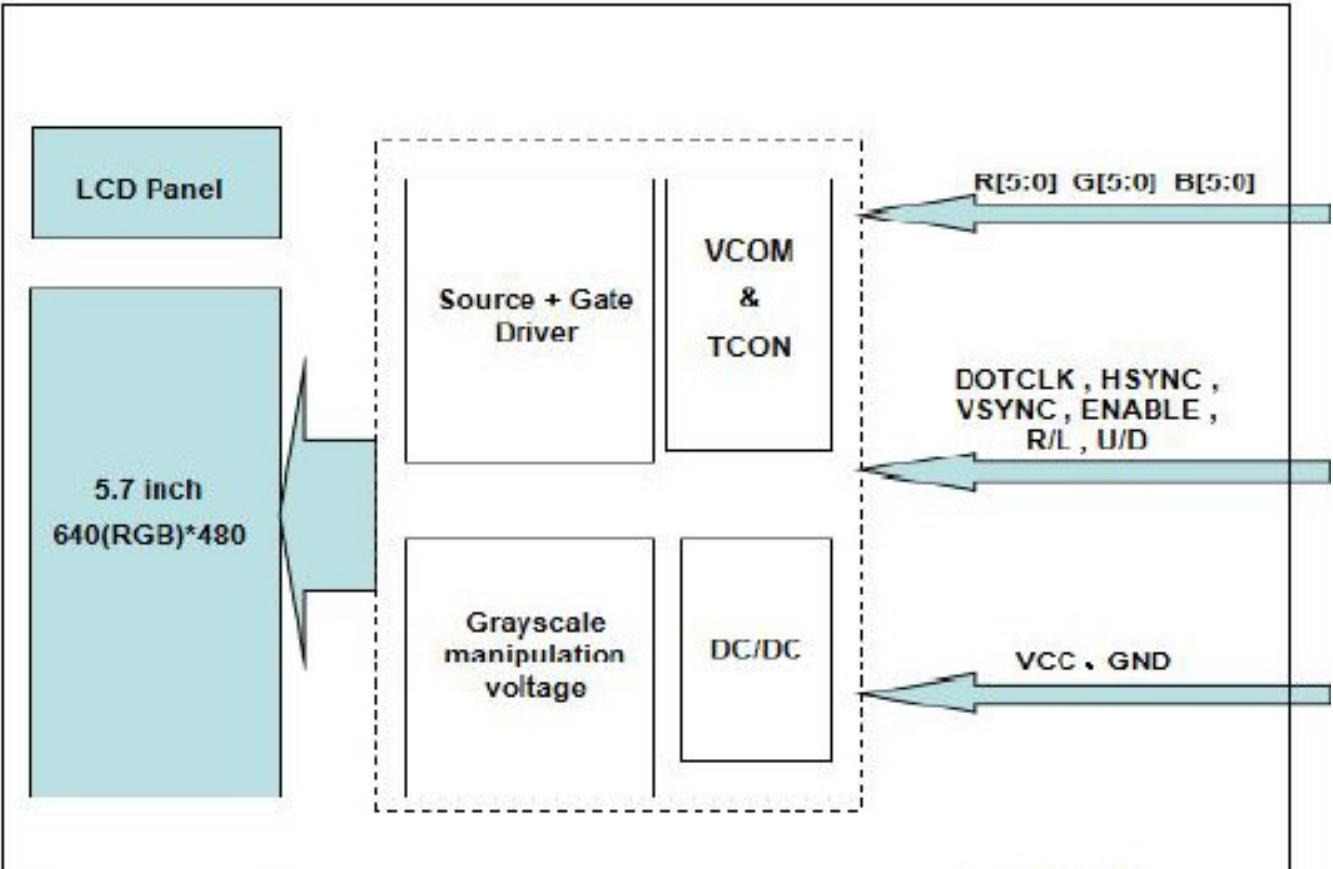

3.DIMENSIONAL

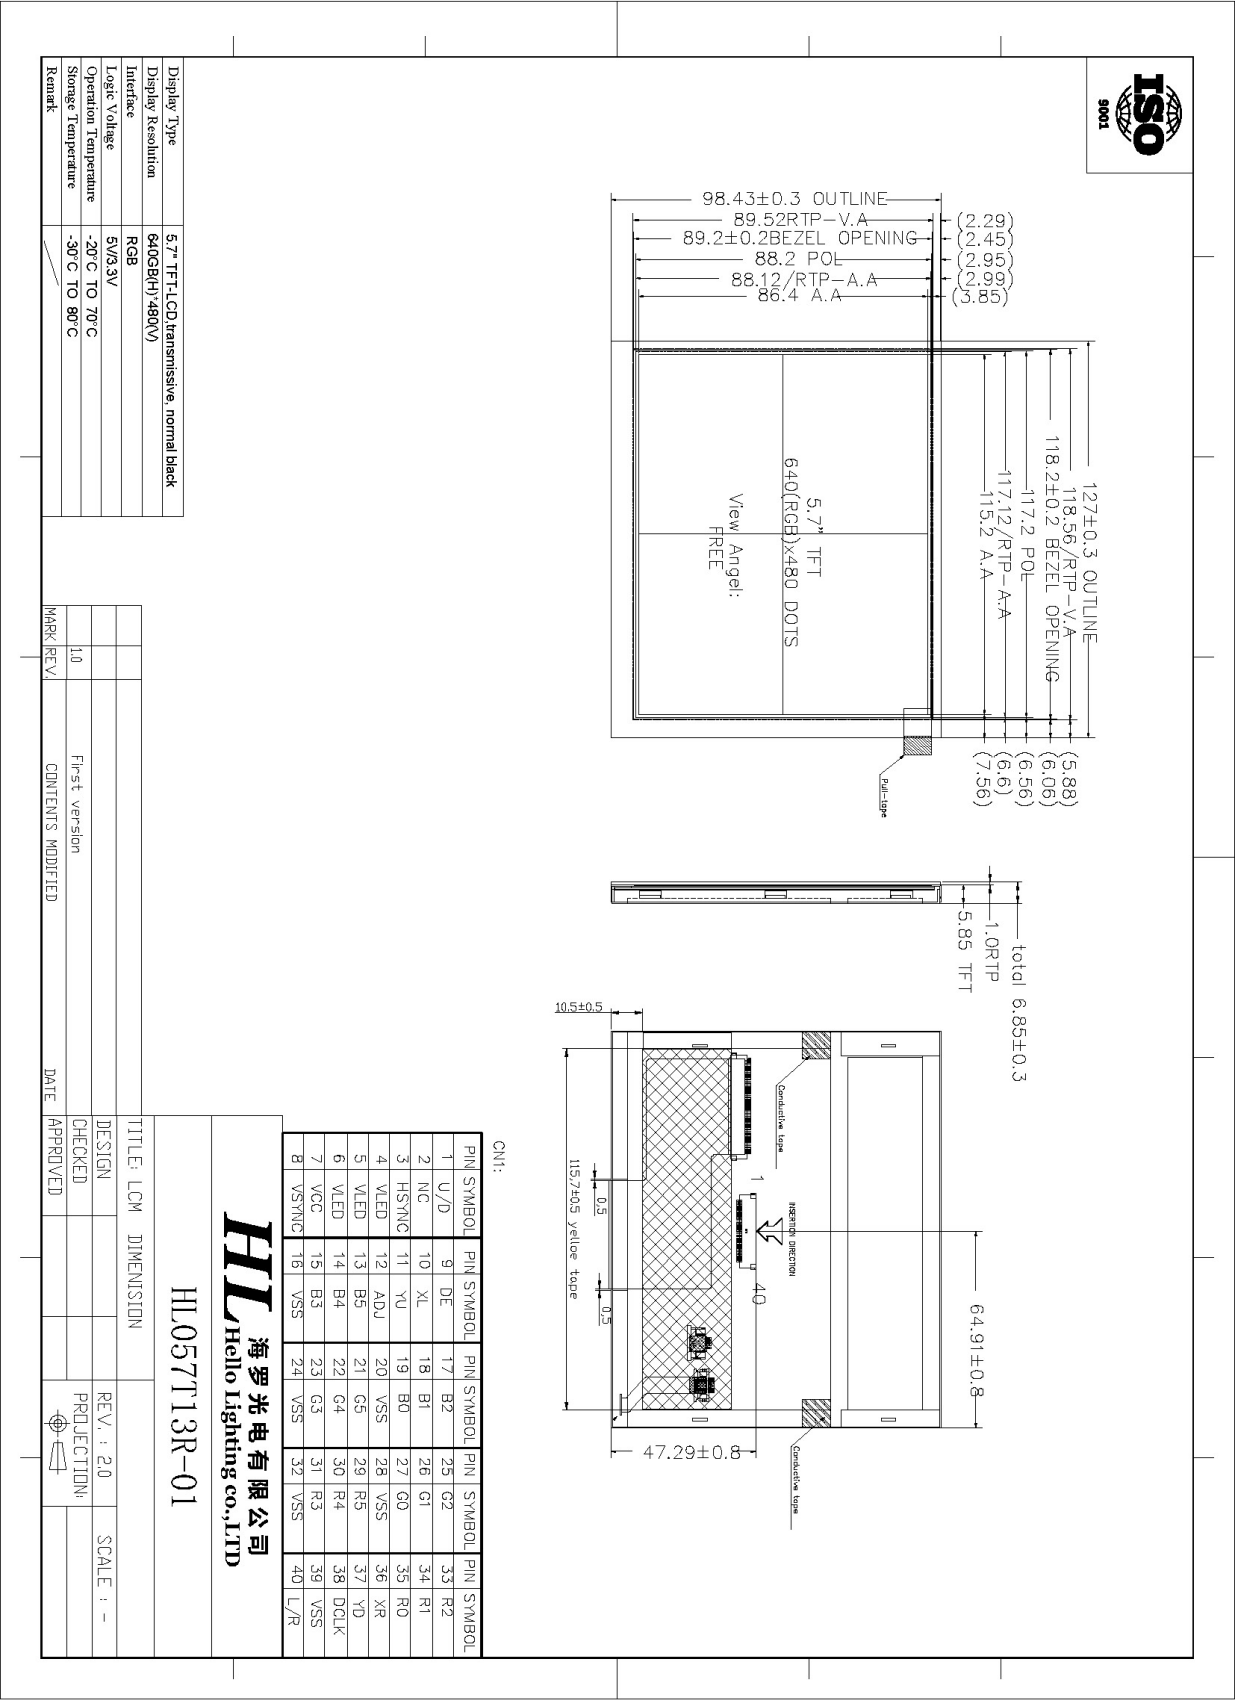

4. PIN DESCRIPTION:

NO.	PIN NAME	I/O	Description
1	U/D	I	UP/Down scan setting When UD=H ,reverse scan. When UD=L ,normal scan
2	NC	-	No connection
3	HSYNC	I	Horizontal SYNC
4	VLED	P	Power supply for LED driver circuit
5	VLED	P	Power supply for LED driver circuit
6	VLED	P	Power supply for LED driver circuit
7	VCC	P	Power supply for LCD
8	VSNC	I	Vertical SYNC
9	DE	I	Date enable pin
10	XL	-	Touch panel left
11	YU	-	Touch panel upper
12	ADJ	I	Brightness control for led B/L
13	B5	I	Blue data bus
14	B4	I	Blue data bus
15	B3	I	Blue data bus
16	VSS	P	Power ground
17	B2	I	Blue data bus
18	B1	I	Blue data bus
19	B0	I	Blue data bus
20	VSS	P	Power ground
21	G5	I	Green data bus
22	G4	I	Green data bus
23	G3	I	Green data bus
24	VSS	P	Power ground
25	G2	I	Green data bus
26	G1	I	Green data bus
27	G0	I	Green data bus
28	VSS	P	Power ground
29	R5	I	red data bus
30	R4	I	red data bus
31	R3	I	red data bus
32	VSS	P	Power ground
33	R2	I	red data bus
34	R1	I	red data bus
35	R0	I	red data bus

36	XR	-	Touch panel right
37	YD	-	Touch panel bottom
38	DCLK	I	Data clock
39	VSS	P	Power ground
40	L/R	I	The shift direction of device internal shift register is controlled by this pin as shown below LR=H: STH→SO1→....→SO960→STHO LR=L: STH→SO960→....→SO1→STHO

Note:

I: host to LCD

P: power

5. MAXIMUM ABSOLTE LIMIT:

Item	Symbol	Value	Unit
Power supply voltage	VCC	-0.3~3.6	V
Power supply voltage for LED	VLED	-0.3~6	V
Input voltage	V _{in}	V _{DD} +0.3	V
Operating temperature	T _{opr}	-20 to 70	°C
Storage temperature	T _{stg}	-30 to 80	°C

Note: Note1: Absolute maximum rating is the limit value beyond which the IC maybe broken.

They do not assure operations.

Note2: Background color changes slightly depending on ambient temperature. This Phenomenon is reversible.

T_a ≤ 70°C: 75%RH max

T_a > 70°C: absolute humidity must be lower than the humidity of 75%RH at 70°C

Note3: T_a at -30°C will be <48hrs, at 80 °C will be <120hrs

6.ELECTRICAL CHARACTERISTICS

6.1 DC Characteristics (V_{DD}=3.3V,T_a=25°C)

Item	Symbol	Min	Type	Max	Unit	Test condition
Power supply	V _{CI}	2.7	3.3	3.5	V	-
Power supply for LED	V _{LED}	4.5	5.0	5.5	V	
Supply current	I _{DD}	-	TBD	-	mA	V _{DD} =3.3V,T _a =25°C
Input voltage	V _{IH}	0.7V _{DD}	-	V _{DD}	V	-
	V _{IL}	0	-	0.3V _{DD}	V	
Input leakage current	I _{IL}	-1.0	-	1.0	μA	V _{IN} =V _{DD} or V _{SS}


Note: Voltage greater than above may damage the module.

All voltages are specified relative to V_{SS}=0V.

7.AC TIMING


Data R, G, B	Vertical Valid	t_v	480	480	480
	Vertical Blank	t_{VBK}	35	45	80
	Vertical Frequency	f_v	55	60	65
	Setup time	t_{DS}	5	-	-
	Hold time	t_{DH}	10	-	-
	Rise, Fall time	t_{Dr}, t_{Df}	-	-	3

Timing Diagram:

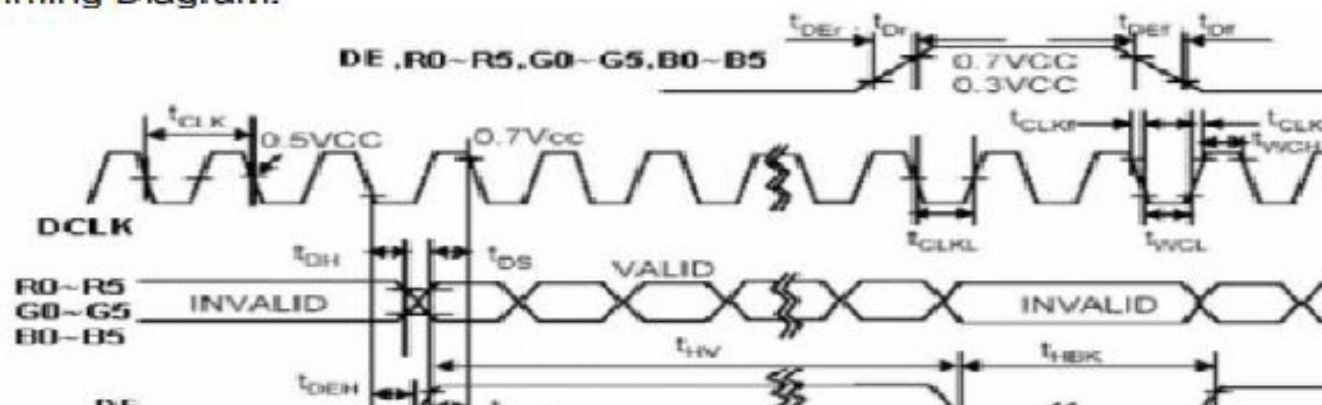


Parameter	Symbol	Min.	Typ.	Max.
Clock Period	t_{CLK}	33	40	43
Clock Frequency	f_{CLK}	23	25	30
Clock Low Level Width	t_{WCL}	6	-	-
Clock High Level Width	t_{WCH}	6	-	-
Clock Rise, Fall Time	t_{CLKr}, t_{CLKf}	-	-	3
HSYNC Period	t_{HP}	750	800	900
HSYNC Pulse Width	t_{HW}	5	30	-
HSYNC Front Porch	t_{HFP}	1	16	116
HSYNC Back Porch	t_{HBP}	1	114	139
HSYNC Width + Back Porch	$t_{HW} + t_{HBP}$	144	144	144
Horizontal Blank	t_{HBK}	1	160	260
Horizontal Valid	t_{HV}	640	640	640

Input Vertical Timing

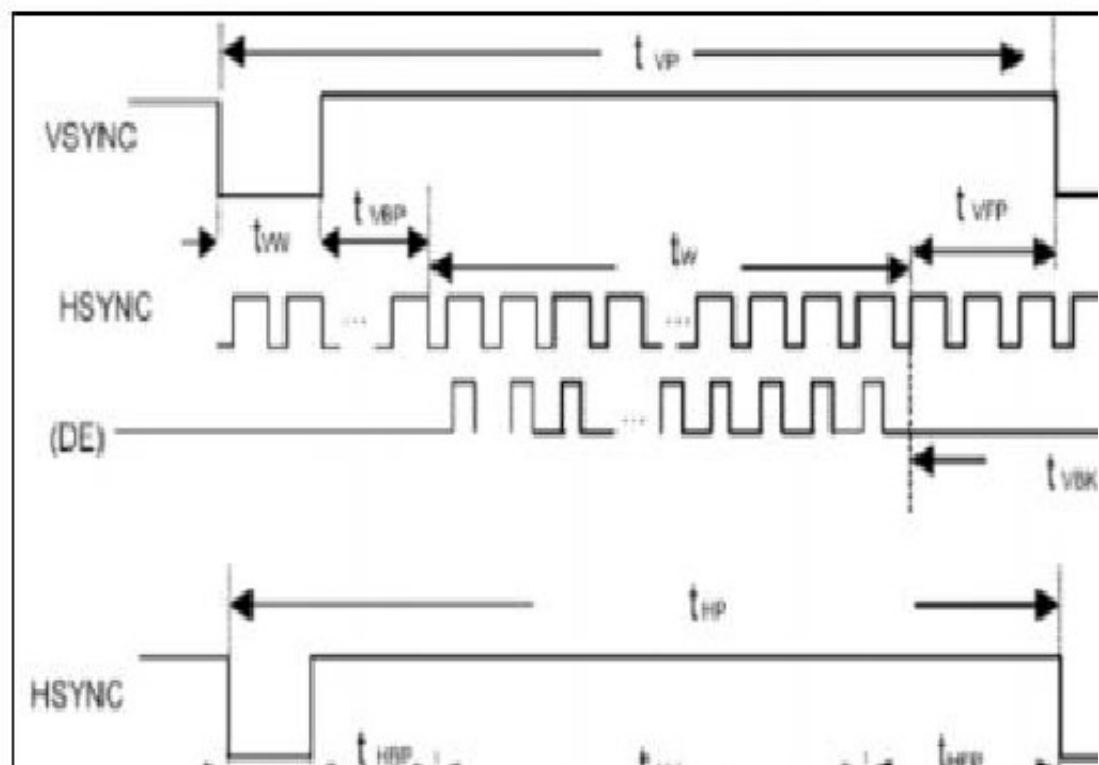

Note: If SYNC mode is used, please fix DE signal to low, DE timing waveform is

Input Horizontal Timing

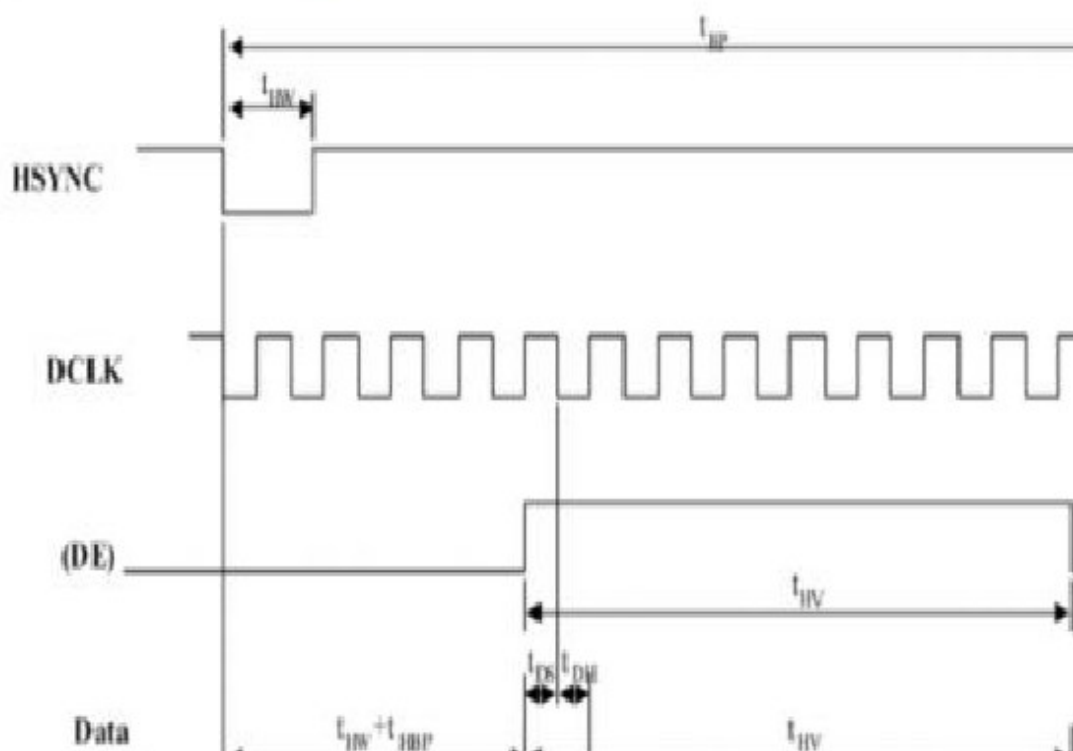

8. OPTICAL CHARACTERISTICS:

Driving the backlight


No.	ITEM		Symbol	Conditions	Specification			Unit	Note
					Min	Typ	Max		
1	Response Time		Tr+Tf	25℃	-	30	35	Ms	(1)(2)
2	Contrast Rate		Cr	θ=0, Normal viewing angle	1000	1200	-	-	(1)(3)
3	Viewing Angle	Hor.	θL	CR>10	70	80	-	Deg	-
			θR		70	80	-		
		Ver.	Θ+		70	80	-		
			Θ-		70	80	-		
4	Chromaticiry	White	x	Brightness is ON	0.278	0.298	0.318		
			y		0.311	0.331	0.51		
		Red	x		0.587	0.607	0.627		
			y		0.310	0.330	0.350		
		Green	x		0.258	0.278	0.298		
			y		0.526	0.546	0.566		
		Blue	x		0.121	0.141	0.161		
			y		0.138	0.158	0.178		
5	NTSC		S			50		%	
6	luminance		L		400	500		cd/m2	
7	Uniformity		U		80			%	

Measure Conditions:


1. Measure surrounding : dark room;
2. Ambient temperature: $25\pm 2^\circ\text{C}$;
3. 30min.warm-up time.

Note Definition:


Note(1)Viewing angle range:

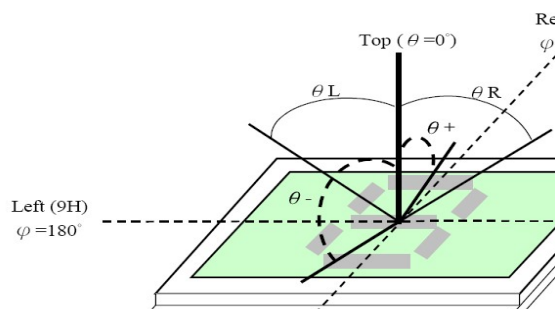

Note(2) Response Time:

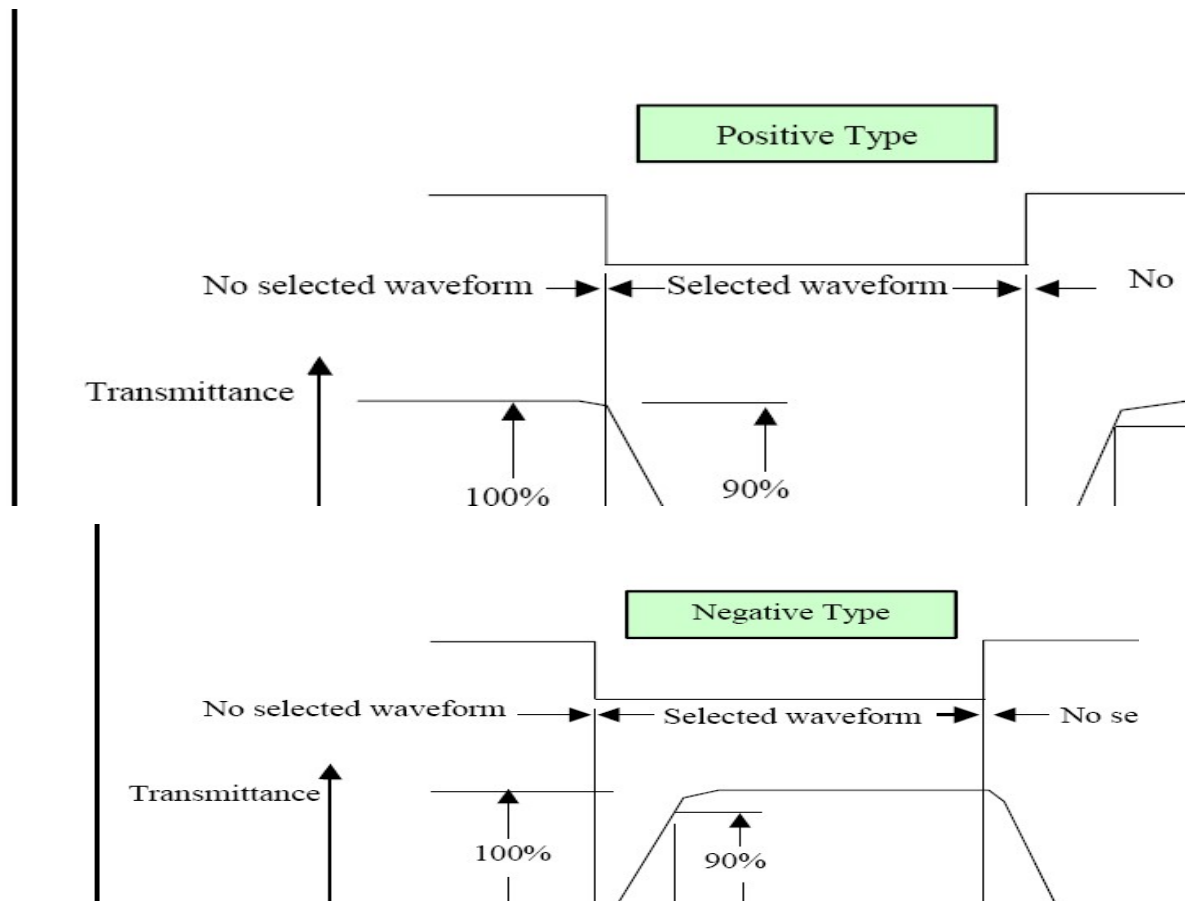


Note(3) Contrast Ratio Definition:

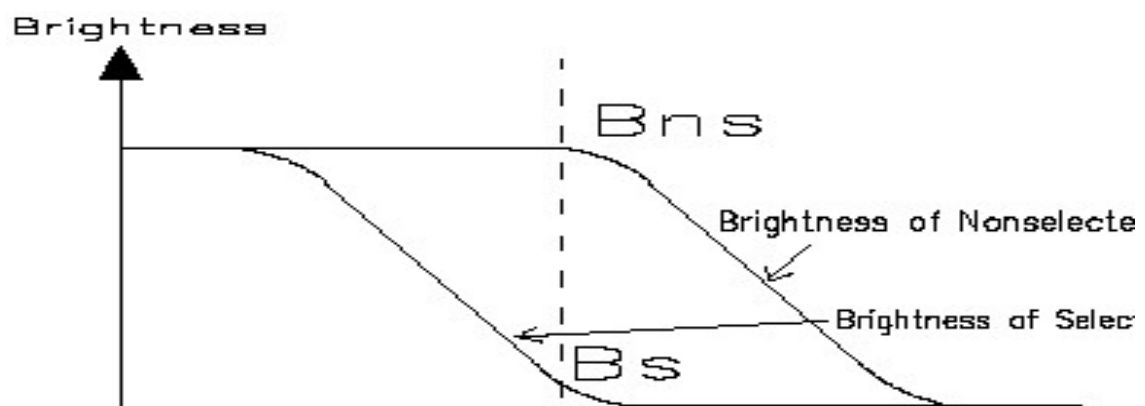

$$\text{Contrast Ratio (Cr)} = \frac{\text{Luminance with all pixel white}}{\text{Luminance with all pixel black}}$$

9.PACKAGE.

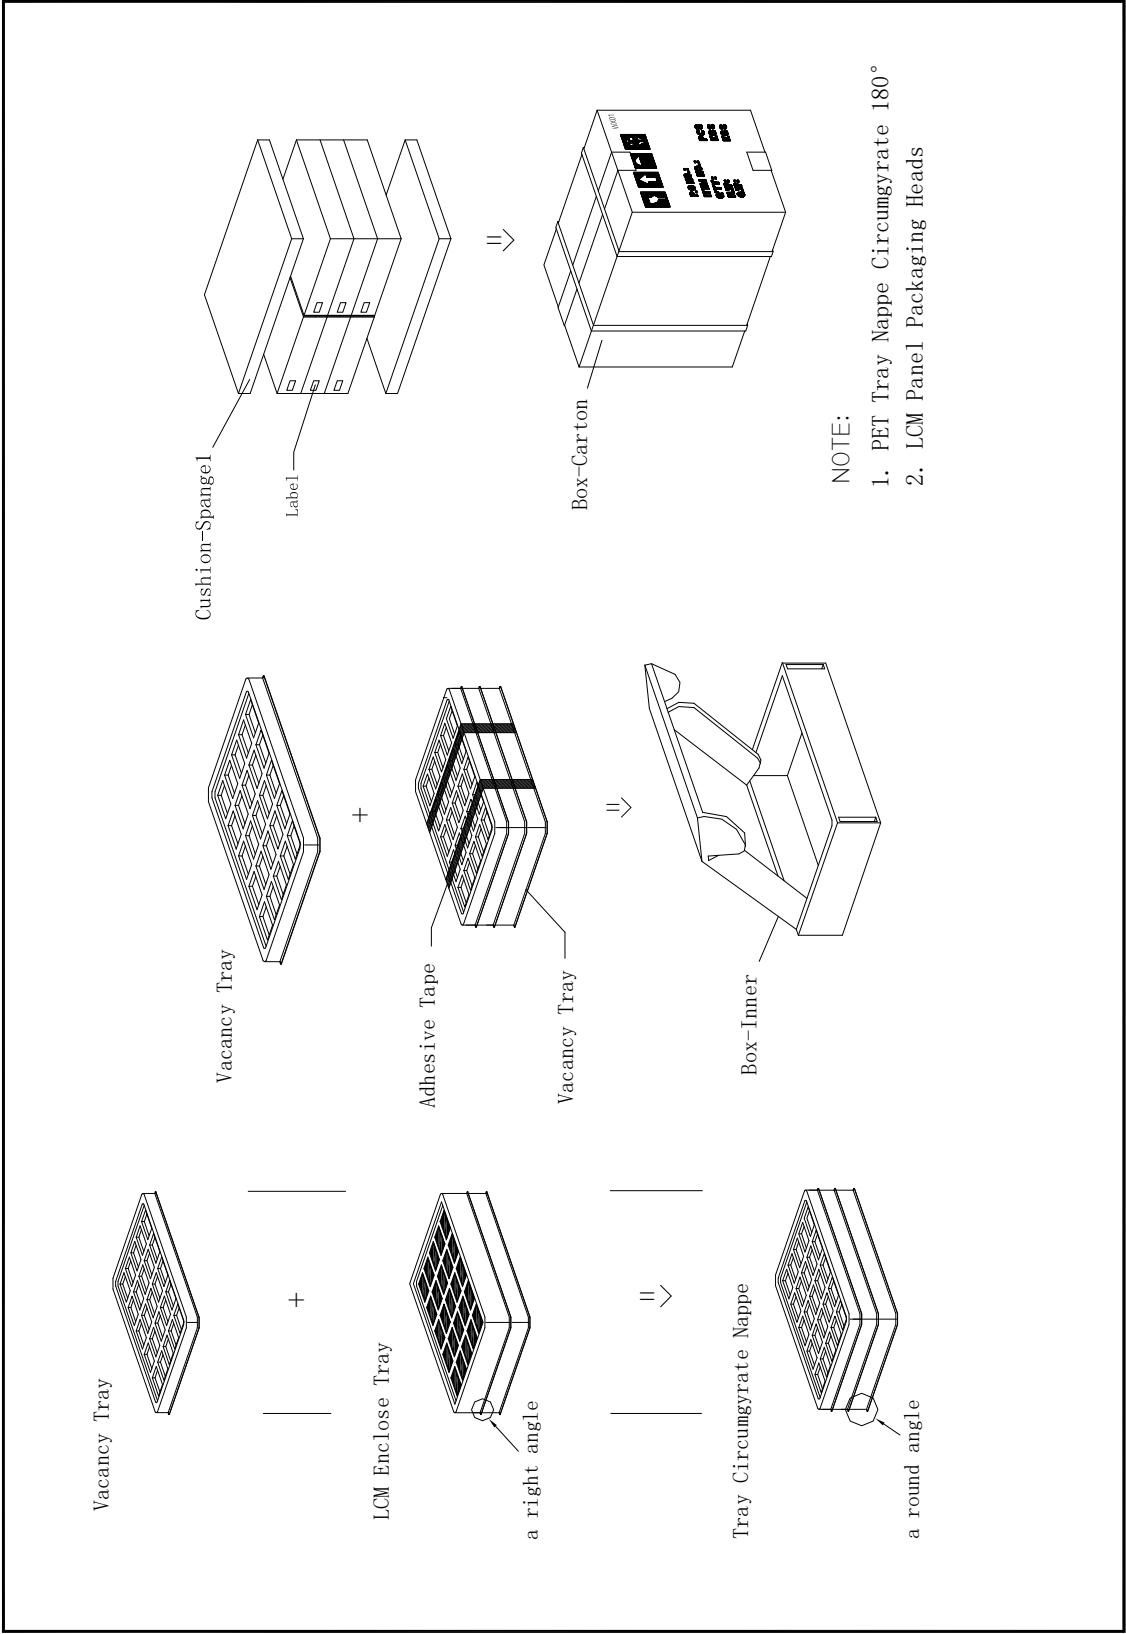

10. STANDARD SPECIFICATION FOR RELIABILITY:

Item	Condition		Time (hrs)	Assessment
High temp. Storage	80°C		240	No abnormalities in functions and appearance
High temp. Operating	70°C		240	
Low temp. Storage	-30°C		240	
Low temp. Operating	-20°C		240	
Humidity	40°C/ 90%RH		240	
Thermal Shock Temp. Cycle	-20°C ← →70°C (0.5hour ← → 0.5 hour)		50cycles	
ESD Testing	HBM:	±8KV		330Ω/150PF
	MM:	±200V		200PF/0Ω

Functions, performance, appearance, etc. shall be free from remarkable deterioration within 50,000 hours under ordinary operating and storage conditions room temperature ($25\pm10^{\circ}\text{C}$), normal humidity ($45\pm20\%$ RH), and in area not exposed to direct sun light. (Life time of backlight, please refer to Data about backlight.)

Testing Conditions and Inspection Criteria:

For the final test the testing sample must be stored at room temperature for 24 hours, after the tests listed in up Table, Standard specifications for Reliability have been executed in order to ensure stability.

Item	Test Model	In section Criteria
Current Consumption	Refer To Specification	The current consumption should conform to the product specification.
Contrast	Refer To Specification	After the tests have been executed, the contrast must be larger than half of its initial value prior to the tests.
Appearance	Visual inspection	Defect free.

11.SPECIFICATION OF QUALITY ASSURANCE:

11.1 Purpose

This standard for Quality Assurance should affirm the quality of LCD Module products to supply.

11.2 Standard for Quality Test

a. Inspection:

Before delivering, the supplier should take the following tests, and affirm the quality of product.

b. Electro-Optical Characteristics:

According to the individual specification to test the product.

c. Test of Appearance Characteristics:

According to the individual specification to test the product.

d. Test of Reliability Characteristics:

According to the definition of reliability on the specification for testing products.

e. Delivery Test:

Before delivering, the supplier should take the delivery test.

(i) Test method: According to MIL-STD105E.General Inspection Level II take a single time.

(ii) The defects classify of AQL as following:

Major defect: AQL = 0.65

Minor defect: AQL = 2.5

Total defects: AQL = 2.5

11.3. Nonconforming Analysis & Deal With Manners

a. Nonconforming Analysis:

(i) Purchaser should supply the detail data of non- conforming sample and the non- conforming.

(ii) After accepting the detail data from purchaser, the analysis of nonconforming should be finished in two weeks.

(iii) If supplier can not finish analysis on time, must announce purchaser before two weeks.

b. Disposition of nonconforming:

(i) If find any product defect of supplier during assembly time, supplier must change the good product for every defect after recognition.

(ii) Both supplier and customer should analyze the reason and discuss the disposition of nonconforming when the reason of nonconforming is not sure.

11.4. Agreement items

Both sides should discuss together when the following problems happen.

a. There is any problem of standard of quality assurance, and both sides think that it must be modified.

b. There is any argument item which does not record in the standard of quality assurance.

c. Any other special problem.

11.5 Standard of The Product Appearance Test

a. Manner of appearance test: This specification should be applied for both light on and off situation.


(i) The test must be under $20W \times 2$ or $40W$ fluorescent light, and the distance of view must be at $30 \pm 5cm$.

(ii) When test the model of transmissive product must add the reflective plate.

(iii)The test direction is base on about around 10° of vertical line (Left graph)

(iiii)Temperature: 25±5°C Humidity: 65±10%RH

It is base on about around 45° of vertical

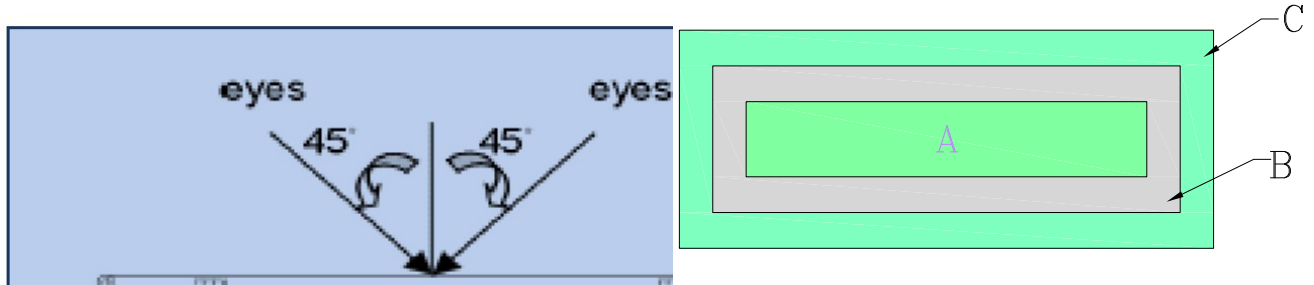

(iv) Definition of area (Right graph)

A. Area: Viewing area. B. Area: Out of viewing area.(Outside viewing area)

b. Basic principle:

(i) It will accord to the AQL when the standard can not be described.

(ii) The sample of the lowest acceptable quality level must be discussed by both supplier and customer when any dispute happened.

(iii) Must add new item on time when it is necessary.

c. Standard of inspection: (Unit: mm)

Allowable limits defined in follow Dot defect Table should be met for each white, black , R, G, B raster.

The limits apply to the entire area. Missing white in 60% or more of typical (one color, R or G or B) pixel aperture is defined as a bright defect, less than 60% is acceptable .Black spot in 60% or more of typical pixel aperture is defined as a dark defect, less than 60% is acceptable.

Dot defect table:

Item		White dot defect	Black dot defect	Total
1	Defect counts	3	3	3
2	Combined defect Counts	No combined dot defect allowed. Two Single dot defect that within 5mm during each dot defect should becouneted as combined dot defect.		



11.6 Inspection specification

AQL inspection standard



Sampling method: MIL-STD-105E, Level II, single sampling

Classify	Item		Note	AQL	
Major	Display state	Short or open circuit	1	0.65	
		Contrast defect (dim, ghost)			
		LC leakage			
		Flickering			
		No display			
		Wrong viewing direction	2		
		Wrong Back-light	7		
	Non-display	Flat cable or pin reverse	9		
		Wrong or missing component	10		
Minor	Display state	Background color deviation	2	2.5	
		Black spot and dust	3		
		Line defect	4		
		Scratch			
		Rainbow	5		
		Pin hole	6		
	Polarizer	Bubble and foreign material	3		
		Scratch	4		
	PCB,FPC	Scratch	4		
	Soldering	Poor connection	8		
	Wire	Poor connection	9		
	LCD	CHIP OUT	11		

Note on defect classification:

No.	Item	Criterion																				
1	Short or open circuit	Not allow																				
	LC leakage																					
	Flickering																					
	No display																					
	Wrong viewing direction																					
	Wrong Back-light																					
2	Contrast defect	Refer to approval sample																				
	Background color deviation																					
3	Point defect, Black spot, dust (incl. Polarizer) ex.: dirt under polarizer, Pinhole of reflector ,glass scratch, dirt under glass,scratch on polarizer $\phi = (X+Y)/2$	 <table><tr><td>Point</td><td>Acceptable Qty.</td></tr><tr><td>Size</td><td></td></tr><tr><td>$\phi \leq 0.20$</td><td>Disregard</td></tr><tr><td>$0.20 < \phi \leq 0.25$</td><td>3</td></tr><tr><td>$0.25 < \phi \leq 0.30$</td><td>2</td></tr><tr><td>$\phi > 0.30$</td><td>0</td></tr></table> Unit: mm	Point	Acceptable Qty.	Size		$\phi \leq 0.20$	Disregard	$0.20 < \phi \leq 0.25$	3	$0.25 < \phi \leq 0.30$	2	$\phi > 0.30$	0								
Point	Acceptable Qty.																					
Size																						
$\phi \leq 0.20$	Disregard																					
$0.20 < \phi \leq 0.25$	3																					
$0.25 < \phi \leq 0.30$	2																					
$\phi > 0.30$	0																					
4	Line defect	 <table><tr><td></td><td>Line</td><td>Acceptable Qty.</td></tr><tr><td>L</td><td>W</td><td></td></tr><tr><td>---</td><td>$0.015 \geq W$</td><td>Disregard</td></tr><tr><td>$3.0 \geq L$</td><td>$0.03 \geq W$</td><td rowspan="2">2</td></tr><tr><td>$2.0 \geq L$</td><td>$0.05 \geq W$</td></tr><tr><td>$1.0 \geq L$</td><td>$0.1 > W$</td><td>1</td></tr><tr><td>---</td><td>$0.05 < W$</td><td>Applied as point defect</td></tr></table> Unit: mm		Line	Acceptable Qty.	L	W		---	$0.015 \geq W$	Disregard	$3.0 \geq L$	$0.03 \geq W$	2	$2.0 \geq L$	$0.05 \geq W$	$1.0 \geq L$	$0.1 > W$	1	---	$0.05 < W$	Applied as point defect
	Line	Acceptable Qty.																				
L	W																					
---	$0.015 \geq W$	Disregard																				
$3.0 \geq L$	$0.03 \geq W$	2																				
$2.0 \geq L$	$0.05 \geq W$																					
$1.0 \geq L$	$0.1 > W$	1																				
---	$0.05 < W$	Applied as point defect																				
5	Rainbow	Not more than two color changes across the viewing area																				





No.	Item	Criterion
-----	------	-----------

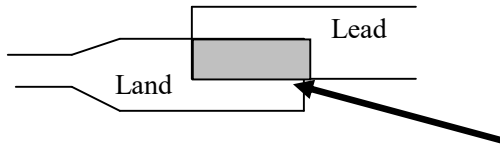6	Segment pattern W = Segment width $\phi = (X+Y)/2$	(1) Pin hole $\phi < 0.10\text{mm}$ is acceptable.  <table border="1"> <tr> <th>Point Size</th> <th>Acceptable Qty</th> </tr> <tr> <td>$\phi \leq 1/4W$</td> <td>Disregard</td> </tr> <tr> <td>$1/4W < \phi \leq 1/2W$</td> <td>1</td> </tr> <tr> <td>$\phi > 1/2W$</td> <td>0</td> </tr> </table> Unit: mm	Point Size	Acceptable Qty	$\phi \leq 1/4W$	Disregard	$1/4W < \phi \leq 1/2W$	1	$\phi > 1/2W$	0
Point Size	Acceptable Qty									
$\phi \leq 1/4W$	Disregard									
$1/4W < \phi \leq 1/2W$	1									
$\phi > 1/2W$	0									
7	Back-light	(1) The color of backlight should correspond its specification. (2) Not allow flickering								
8	Soldering	(1) Not allow heavy dirty and solder ball on PCB or FPC. (The size of dirty refer to point and dust defect) (2) Over 50% of lead should be soldered on Land. 								
9	Wire	(1) Copper wire should not be rusted (2) Not allow crack on copper wire connection. (3) Not allow reversing the position of the flat cable. (4) Not allow exposed copper wire inside the flat cable.								
10	PCB,FPC	(1) Not allow screw rust or damage. (2) Not allow missing or wrong putting of component.								

11

LCD


2.1.1 chip on the surface

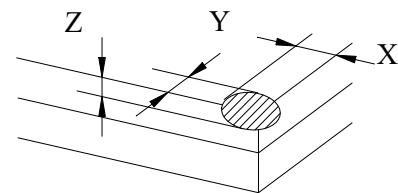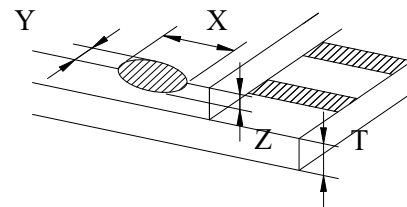

Note: A: LCD Length

X	Y	Z
$>1/8A$	$\leq 0.3\text{mm}$	$\leq 1/2T$
$\leq 1/8A$	Not enter into epoxy frame	$\leq T$
	Not enter into the inner edge of epoxy	$\leq 1/2T$

2.1.2 Chip on the terminal

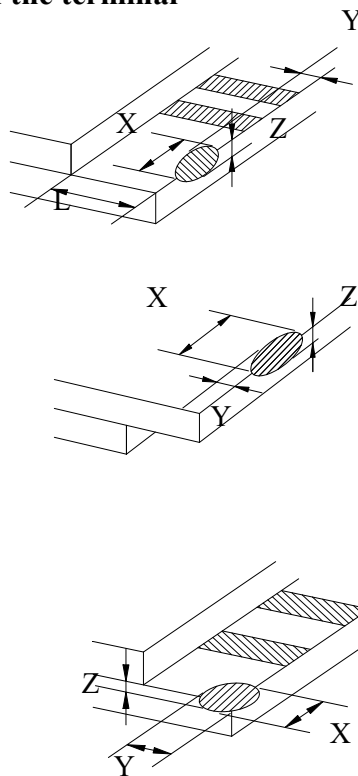


X	Y	Z
$>1/8A$	$\leq 0.3\text{mm}$	$\leq 1/2T$
$\leq 1/8A$	$\leq 1/2L$	$\leq T$
$\leq 1/8A \& \leq 1\text{mm}$	$\leq L$	$\leq T$
$\leq 1/8A \& \leq 2\text{mm}$	$\leq L$	$\leq 1/2T$

Note: A: LCD Length.



the distance between crack and contact pad must be greater than the width of 1st contact pad.

2.1.3 Chip out on between side

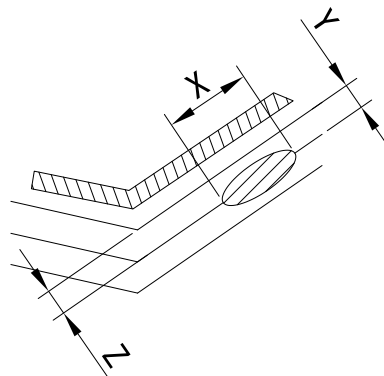

11


LCD



X	Y	Z
$\leq 1/8A$	Not enter into epoxy frame	$Z \leq 2T$
	Not enter into 1/2 epoxy frame	$Z \leq 1/2T$

Note: A : LCD Length

2.1.4 including corner chip and side chip

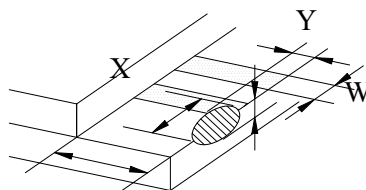


L

Note: A:LCD Length


X	Y	Z
$>1/8A$	$\leq 1/6L$	$\leq 1/2T$
$\leq 1/8A$	$\leq 1/3L$	
$\leq 1/4W$	$\leq 2/3L$	

2.2 Chip out



- 1) Chip out is that crackles extend to inner edge.
- 2) Crackles round epoxy frame will be rejected.
- 3) Chip out on the terminal will be rejected: $Z=T$ length $>1\text{mm}$ or $Z<T$ length $>2\text{mm}$
- 4) The chip out at ITO will be rejected.

2.3 Poor cutting



X	Y	Z
$>1/8$ A	≤ 0.3	$\leq 1/2T$
$\leq 1/8$ A	According to drawing	$1/2T \leq Z \leq T$

Note : A: LCD Length.

According to the <Acceptable of electronic assemblies>
IPC-A-610C class 2 stander. Component missing or function defect
are Major defect ,the others are Minor defect.

Any one out of the specification will be rejected.

12. GENERAL PRECAUTIONS

(1) Mounting Method

The panel of the LCD Module consists of two thin glass plates with polarizers which easily get damaged since the Module is fixed by utilizing fitting holes in the printed circuit board. Extreme care should be taken when handling the LCD Modules.

(2) Caution of LCD handling & cleaning

When cleaning the display surface, use soft cloth with solvent (recommended below) and wipe lightly.

- Isopropyl alcohol
- Ethyl alcohol
- Trichlorotrifluoroethane

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface. Do not use the following solvent:

- Water
- Ketone
- Aromatics

(3) Caution against static charge

The LCD Module use C-MOS LSI drivers, so we recommend that you connect any unused input terminal to VDD or VSS, do not input any signals before power is turned on. And ground your body, Work/assembly table. And assembly equipment to protect against static electricity.

(4) Packaging

Modules use LCD elements, and must be treated as such. Avoid intense shock and falls from a height.

- To prevent modules from degradation. Do not operate or store them exposed directly to sunshine or high temperature/humidity.

(5) Caution for operation

- It is indispensable to drive LCD's within the specified voltage limit since the higher voltage than the limit shorten LCD life. An electrochemical reaction due to direct current causes LCD deterioration, Avoid the use of direct current drive.
- Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark color in them.

However those phenomena do not mean malfunction or out of order with LCD's which will come back in the specified operating temperature range.

- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- As light dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal

open circuit.

Usage under the relative condition of 40°C, 50%RH or less is required.

(6) Storage

In the case of storing for a long period of time (for instance, for years) for the purpose or replacement use, The following ways are recommended.

- Storage in a polyethylene bag with sealed so as not to enter fresh air outside in it, And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light is.

Keeping temperature in the specified storage temperature range.

- Storing with no touch on polarizer surface by the anything else. (It is recommended to store them as they have been contained in the inner container at the time of delivery)

(7) Safety

- It is recommendable to crash damaged or unnecessary LCD into pieces and wash off liquid crystal by using solvents such as acetone and ethanol which should be burned up later.
- When any liquid crystal leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water.

Hello Lighting co., ltd reserves the right to change this specification.

www.hello-lighting.com

- END -