

**SPECIFICATION
OF
LCD MODULE**

MODULE NO.: HL064T01-01

Customer Approval:

☐ **Accept**

☐ **Reject**

	SIGNATURE	DATE
PREPARED BY		
CHECKED BY		
APPROVED BY		

DOCUMENT REVISION HISTORY


Sample Version	Doc. Version	DATE	DESCRIPTION	CHECKED BY
	A0	2025-11-21	First Release.	


1. MECHANICAL SPECIFICATIONS:

ITEM	SPECIFICATION	UNIT
OUTLINE DIMENSIONS	140.65 (W) X110.5 (H) X4.83(D)	mm
ACTIVE AREA	129.79x97.34	mm
DISPLAY SIZE	6.4	inch
DOT PITCH	0.1267mmX0.1267mm	mm
NUMBER OF DOTS	1024* (RGB) *768	-
LCD TYPE	TFT TRANSMISSIVE, Normal black	-
BACKLIGHT TYPE	LED White	-
VIEWING DIRECTION	FREE	-

***See attached drawing for details.**

2.BLOCK DIAGRAM:

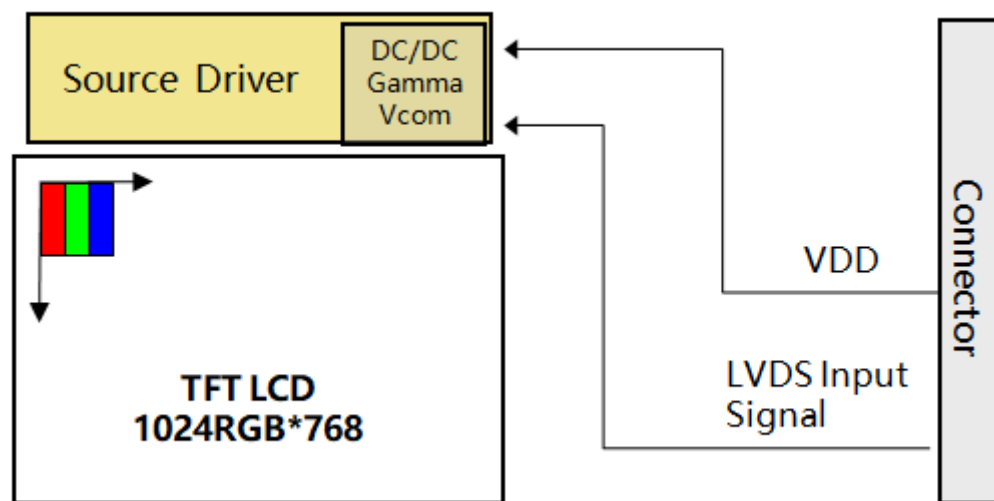



1	VLED
2	VLED
3	GND
4	GND
5	PWM
6	EN
7	GND
8	GND
9	VDD
10	VDD
11	GND
12	GND
13	RX0+
14	RX0+
15	GND
16	RX1+
17	RX1+
18	GND
19	RX2-
20	RX2+
21	GND
22	RXC-
23	RXC+
24	GND
25	RX3-
26	RX3+
27	CSB
28	SC
29	SOL
30	SCL

10	First version	CHECKED			PROJECTION: 
MARK REV.	CONTENTS MODIFIED	DATE	APPROVED		

TITLE: LCM	DIMENSION	REV. : 2.0	SCALE : -
DESIGN		PROJECTION:	
CHECKED			
APPROVED			

HL 海罗光电有限公司
Hello Lighting co.,LTD

HL064T01-01

4. PIN DESCRIPTION:

4.1 Pin defines for LCD input.

Connector Part No. : FH52-30S-0.5SH or Equivalent

NO.	PIN NAME	I/O	Description
1	VLED	I	Power supply for LED,12V
2	VLED	I	
3	GND	P	Power Ground
4	GND	P	Power Ground
5	PWM	I	Backlight brightness control, active HIGH
6	EN	I	Backlight enable, active HIGH
7	GND	P	Power Ground
8	GND	P	Power Ground
9	VDD	I	Power supply for LCD, 3.3v
10	VDD	I	
11	GND	P	Power Ground
12	GND	P	Power Ground
13	RX0-	I	LVDS differential data input pair 0
14	RX0+	I	
15	GND	P	Power Ground
16	RX1-	I	LVDS differential data input pair 1
17	RX1+	I	
18	GND	P	Power Ground
19	RX2-	I	LVDS differential data input pair 2
20	RX2+	I	
21	GND	P	Power Ground
22	RXC-	I	LVDS differential clock input pair
23	RXC+	I	
24	GND	P	Power Ground
25	RX3-	I	LVDS differential data input pair 3
26	RX3+	I	
27	CSB	I	Serial interface enable
28	SC	I	Scan direction selection H: normal, L: reverse
29	SDI	IO	Serial data input/output
30	SCL	I	Serial clock input

Note:

1. P: power pin. I: input pin, host to LCD, IO: host to LCD or LCD to host

5. MAXIMUM ABSOLUTE LIMIT:

Item	Symbol	Value	Unit
Power supply voltage for logic	V_{DD}	-0.3~4	V
Input voltage	V_{in}	$V_{DD}+0.3$	V
Operating temperature	T_{opr}	-30 to 85	°C
Storage temperature	T_{stg}	-30 to 85	°C
BL input voltage	V_{LED}	-0.3~18	V
BL enable input	PWM	0~4	V
BL adjustment input	EN	0~4	V

Note: Note1: Absolute maximum rating is the limit value beyond which the IC maybe broken.

They do not assure operations.

Note2: Background color changes slightly depending on ambient temperature. This Phenomenon is reversible.

$T_a \leq 70^{\circ}\text{C}$: 75%RH max

$T_a > 70^{\circ}\text{C}$: absolute humidity must be lower than the humidity of 75%RH at 70°C

Note3: T_a at -30°C will be <48hrs, at 80°C will be <120hrs

6.ELECTRICAL CHARACTERISTICS

6-1 DC Characteristics ($V_{DD}=3.3\text{V}$, $T_a=25^{\circ}\text{C}$)

Item	Symbol	Min	Type	Max	Unit	Test condition
Operating voltage	V_{DD}	3.0	3.3	3.6	V	(1)
Rush Current	I_{rush}			1.95	A	
Input voltage	V_{IH}	0.7VDD	-	VDD	V	-
	V_{IL}	0	-	0.3VDD	V	
Input leakage current	I_{IL}	-1.0	-	1.0	μA	$V_{IN}=V_{DD}$ or V_{SS}

Note (1) This display should be always operated within above ranges.

6-2 Backlight Electrical-optical Characteristics

1. Stander Lamp Styles(Edge Lighting Type):

The LED chips are distributed over the edge light area of the illumination unit, which gives the less power consumption:

2. The Main Advantages of the LED Backlight are as following:

2.1 The brightness of the backlight can simply be adjusted by a resistor or a potentiometer.

3. Data About LED Backlight:

Item	Symbol	MIN	TYP	MAX	UNIT	Test Condition	Note
Supply Voltage	Vf	11.2	12	12.8	V		
Supply Current	If	250			mA		-
Uniformity for LCM	-	80	-	-	%		
Life Time	-	30000	-	-	Hr		-
PWM frequency	Fpwm	100		2000	HZ		
Backlight Color	White						

NOTE:

1. Average Luminous Intensity of P1-P9

2. Uniformity = Min/Max * 100%

3.LED life time defined as follows: The final brightness is at 70% of original brightness

Measured Method: (X*Y: Light Area)(Left Draft as follow)

Internal Circuit Diagram(Right Draft as follow)

(Effective spatial Distribution)

Hole Diameter ø 3mm ; 1 to 9 per Position Measured Luminous:


7.AC TIMING


7.1 LVDS timing

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Clock frequency	RxFCLK	60.5	64.9	69.6	MHz	
Horizontal Display Area	Thv	1024			DCLK	
HS Pulse Width	Tw _h	20	24	40	DCLK	
HS back porch	Th _{bp}		176		DCLK	
HS front porch	Th _{fp}	40	120	200	DCLK	
1 horizontal line	Th _p	1264	1344	1424	DCLK	
Vertical Display Area	Tv _v	768			H	
VS Pulse Width	Tw _v	2	6	10	H	
VS back porch	Tv _{bp}		16		H	
VS front porch	Tv _{fp}	8	16	25	H	
1 vertical field	Tv _p	798	806	815	H	
Frame rate	FR	-	60	-	HZ	


Note: Refer to input timing, Type 1

7.2 Signal Format(VESA)

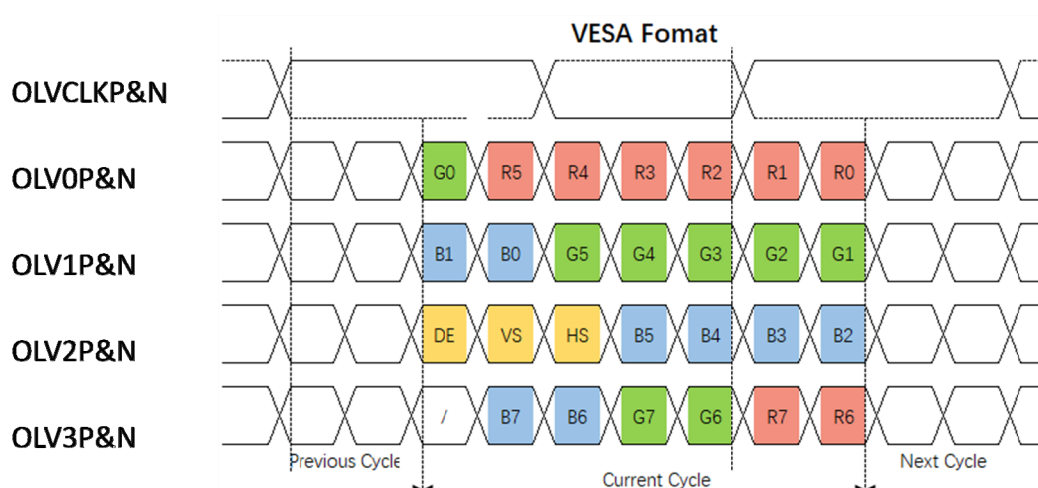

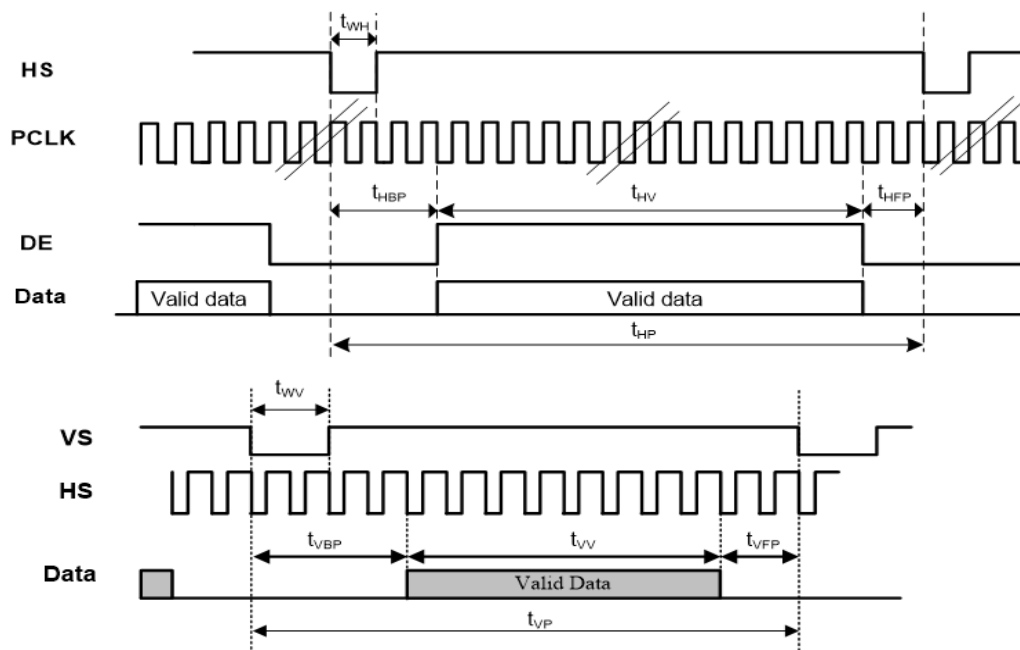


LVDS input timing type 1

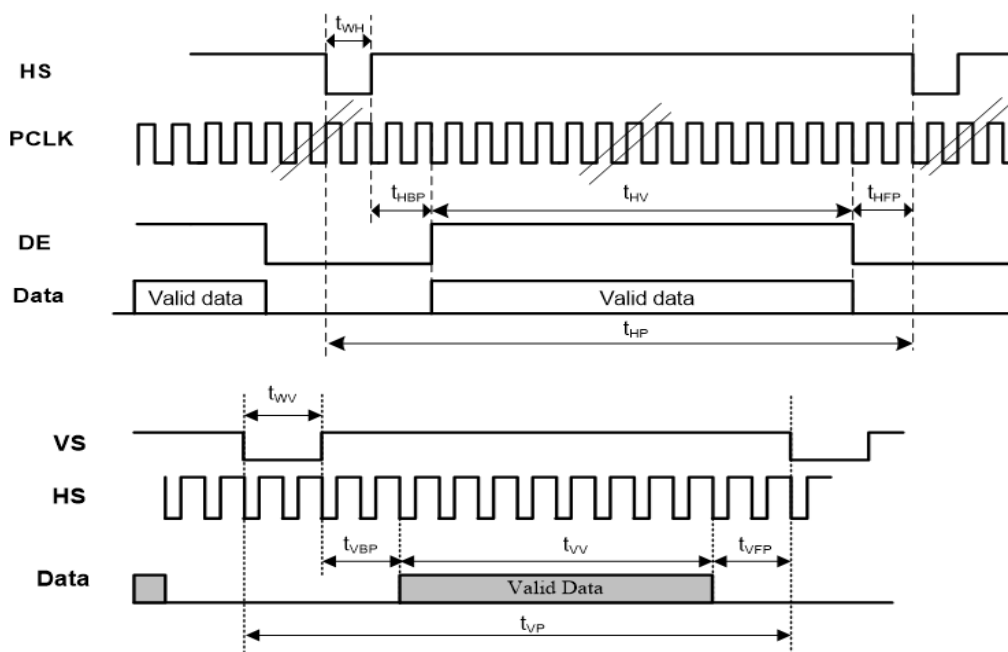

LVDS input timing type 2

7.3 LVDS AC Characteristics

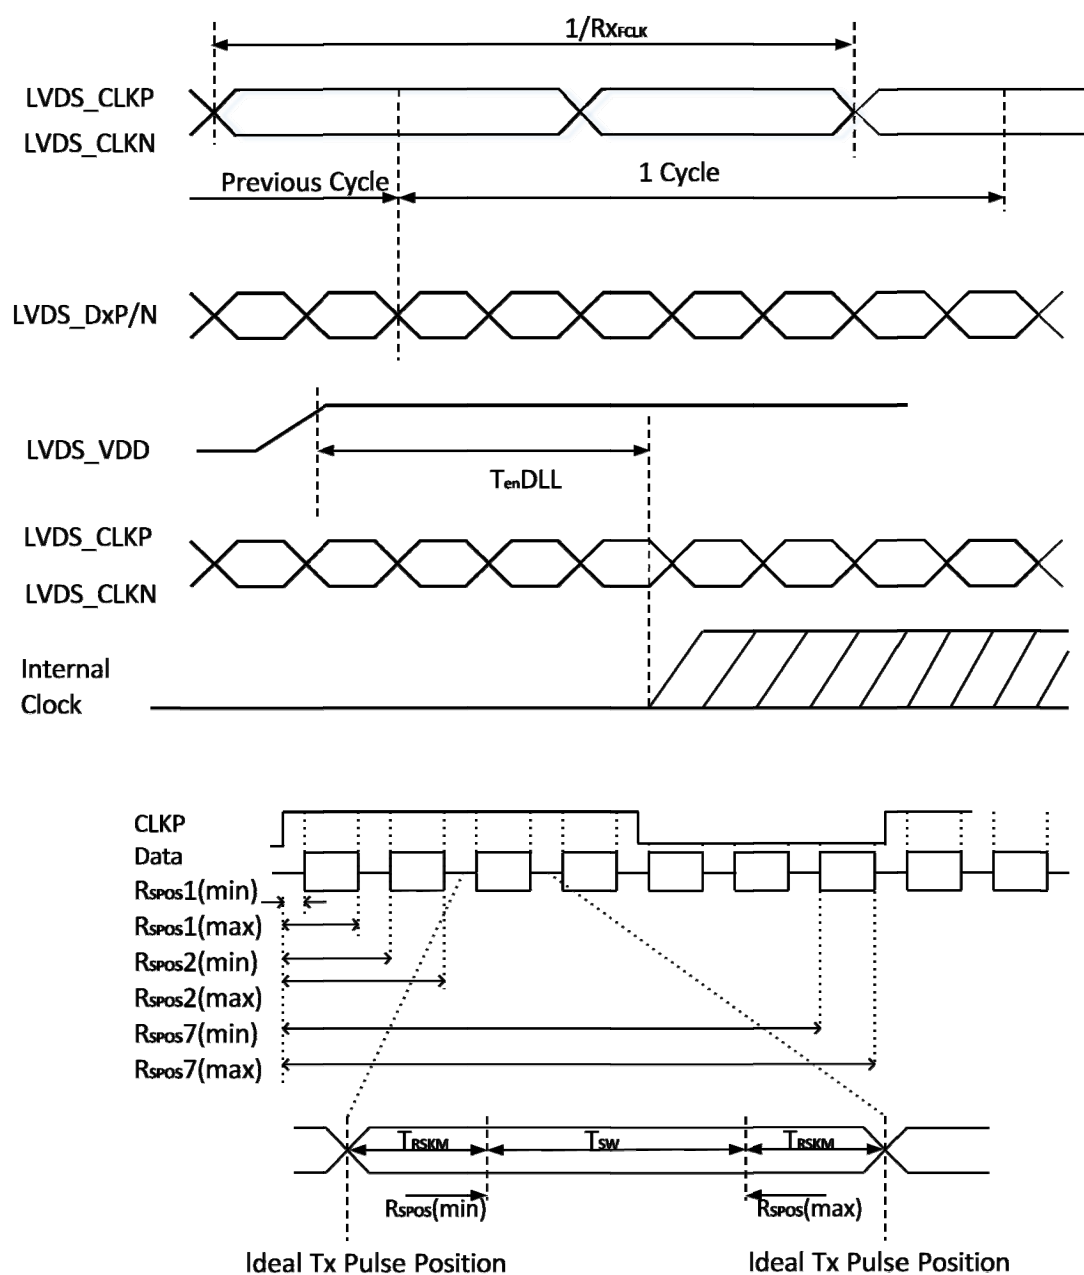

TSW: Strobe width (Internal data sampling window)

Rspos : Receiver strobe position

TRSKM : Receiver strobe margin


Signal	Symbol	Min.	Typ	Max	Unit	Description
Clock frequency	R_{xFCLK}	30		71	MHz	Refer to input timing table for each display resolution

Input data skew margin	T_{RSKM}	50		-	ps	$ VID = 200\text{mV}$ $R_{xVCM} = 1.2\text{V}$ $R_{xFCLK} = 81\text{MHz}$
Clock high time	T_{LVCH}	-	$4/(7 \times R_{xFCLK})$	-	ns	-
Clock low time	T_{LVCL}	-	$3/(7 \times R_{xFCLK})$	-	ns	-
DLL wake-up time	T_{en}^{DLL}	-		150	us	

7.4 LVDS DC Characteristics


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Differential input high threshold voltage	R_{xVTH}	$R_{xVCM}=1.2\text{V}$	+0.1	0.2	0.3	V
Differential input low threshold voltage	R_{xVTL}		-0.3	-0.2	-0.1	V
Input voltage range (singled-end)	R_{xVIN}		0.7	-	1.7	V
Differential input common mode voltage	R_{xVCM}	$ VID =0.2$	1	1.2	1.4	V
Differential input impedance	ZID		80	100	125	ohm
Differential input voltage	VID		0.2	-	0.6	V
Differential input leakage current	I_{LCLVDS}		-10	-	+10	uA
LVDS Digital Stand-by Current	I_{STLVDS}	Clock & all Functions are stopped	150	-	300	uA

Single-End Signals

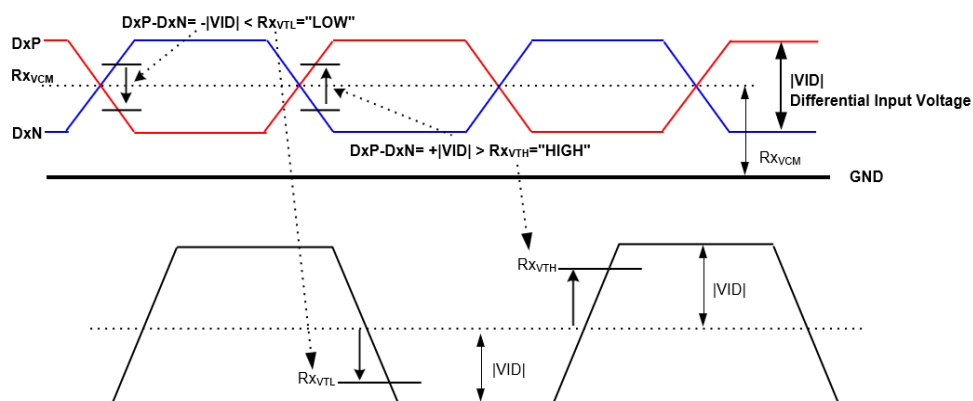

Note : AC and DC characteristics of the above LVDS is an acceptable specification for the driver IC, and the system output specification needs to be tested and validated with the entire module to meet the IC requirements .


7.3 POWER SEQUENCE

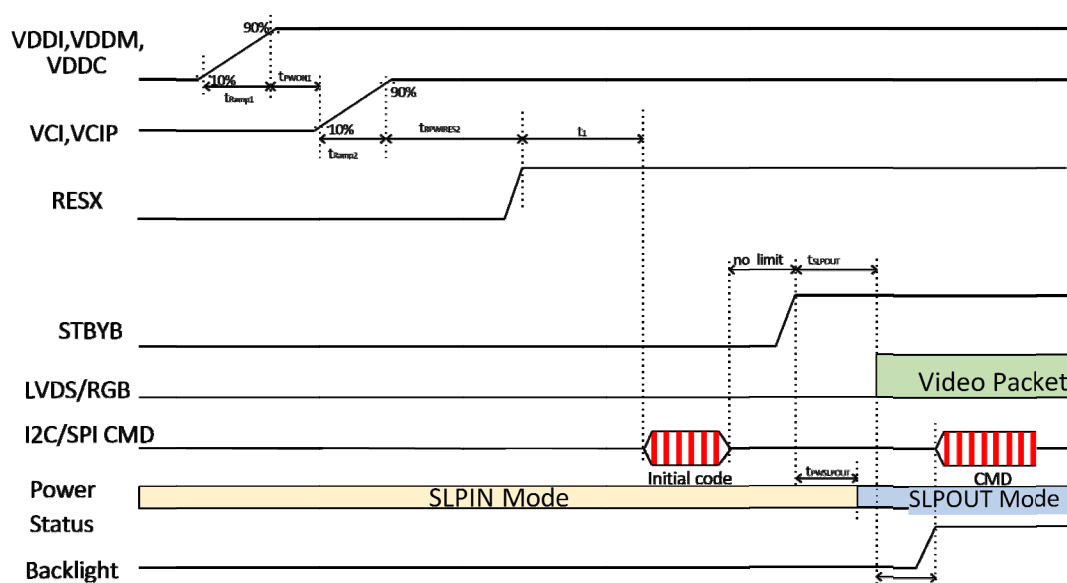

Symbol	Value			Unit	Remark
	Min	Typ	Max		
^t PWON1	0	5	-	ms	
^t ramp1	0.2	-	20	ms	VDDI, VDDM
^t ramp2	0.2	-	20	ms	VCI, VCIP, VSP
^t RPWIRES2	1	-	-	ms	
^t 1	5	-	-	ms	
^t PWSLPOUT	-	45	-	ms	
^t BLON	2	-	-	VS	

Note1: RESET needs to be powered on slightly earlier than TP_RST>0ms

Power ON/OFF sequence:

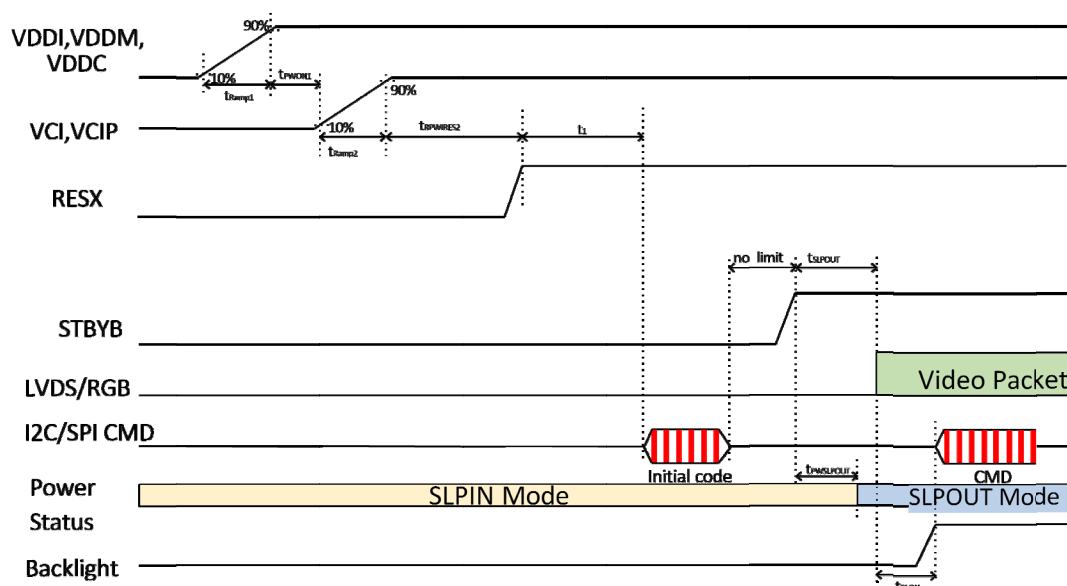

Symbol	Value			Unit	Remark
	Min	Typ	Max		
t_{PWON1}	0	5	-	ms	
t_{ramp1}	0.2	-	20	ms	VDDI, VDDM
t_{ramp2}	0.2	-	20	ms	VCI, VCIP, VSP
$t_{RPWIRES2}$	1	-	-	ms	
t_1	5	-	-	ms	
$t_{PWSLPOUT}$	-	45	-	ms	
t_{BLON}	2	-	-	VS	

Note1: RESET needs to be powered on slightly earlier than TP_RST>0ms

8. OPTICAL CHARACTERISTICS:

Driving the backlight


No.	ITEM		Symbol	Conditions	Specification			Unit	Note
					Min	Typ	Max		
1	Response Time		Tr+Tf	25℃	-	30	35	Ms	(1)(2)
2	Contrast Rate		Cr	θ=0, Normal viewing angle	1000	1200	-	-	(1)(3)
3	Viewing Angle	Hor.	θL	CR>10	80	85	-	Deg	-
			θR		80	85	-		
		Ver.	Θ+		80	85	-		
			Θ-		80	85	-		
4	Chromaticiry	White	x	Brightness is ON	0.281	0.311	0.341		
			y		0.304	0.334	0.364		
		Red	x		0.622	0.652	0.682		
			y		0.310	0.340	0.370		
		Green	x		0.293	0.323	0.353		
			y		0.575	0.605	0.635		
		Blue	x		0.119	0.149	0.179		
			y		0.023	0.053	0.083		
5	NTSC		S		65	70		%	
6	luminance		L		320	400		cd/m2	
7	Uniformity		U		80			%	
8	Flicker						28	Db	
9	Gamma				1.9	2.2	2.5		
10	croostalk						2	%	

Measure Conditions:


1. Measure surrounding : dark room;
2. Ambient temperature: 25±2℃;
3. 30min.warm-up time.

Note Definition:


Note(1)Viewing angle range:

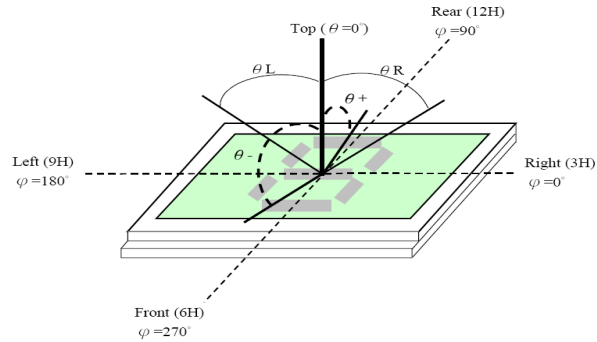

Note(2) Response Time:

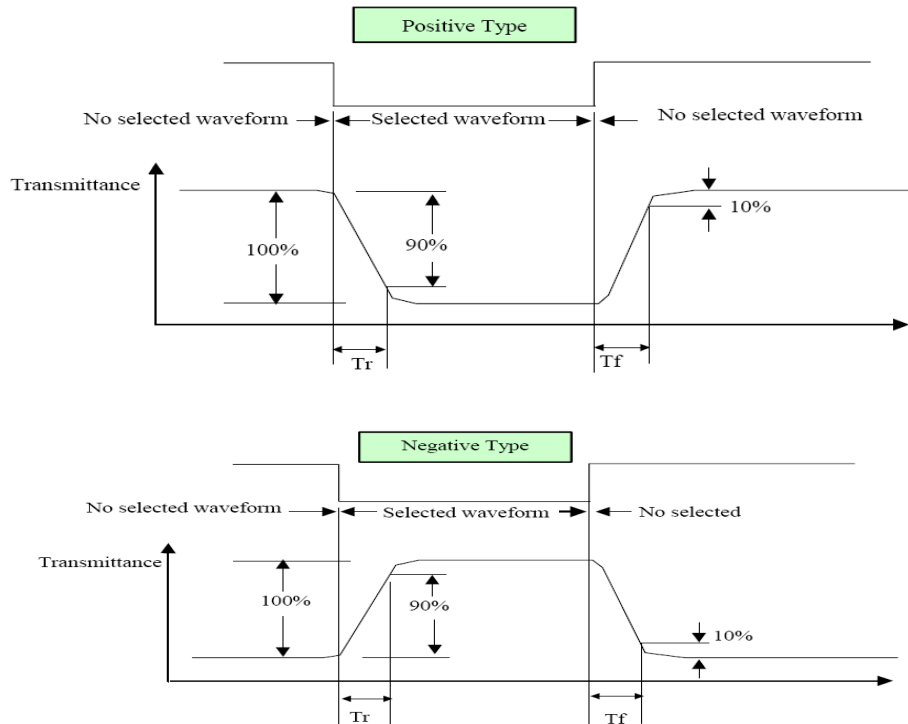

Note(3) Contrast Ratio Definition:

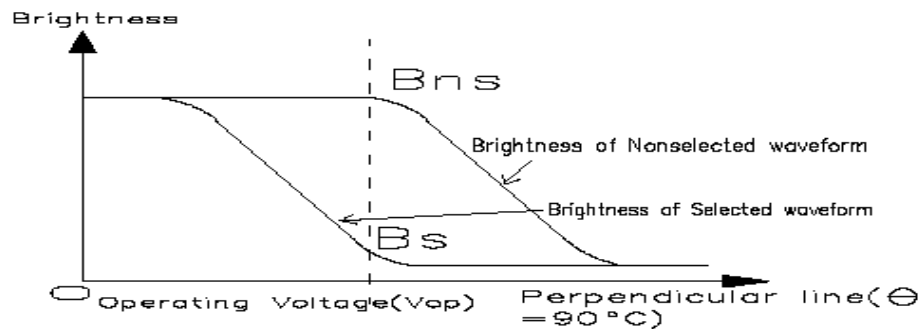

$$\text{Contrast Ratio (Cr)} = \frac{\text{Luminance with all pixel white}}{\text{Luminance with all pixel black}}$$

9.PACKAGE.

9.1 QR CODE FOR DISPLAY



Part(1): QR code value

HL064T01-01-W-YYWWXXXX

(1) (2) (3)

(1): fix to HL064T01-01

(2): fix to W : means white color backlight

(3): product data/serial number:

YY: year

WW: week

XXXX: serial number.


Part(2): Hello Lighting part number

Fix to HL064T01-01


Part(3): Serial number

Same to (3) of Part(1);

9.2 PACKAGE METHOD

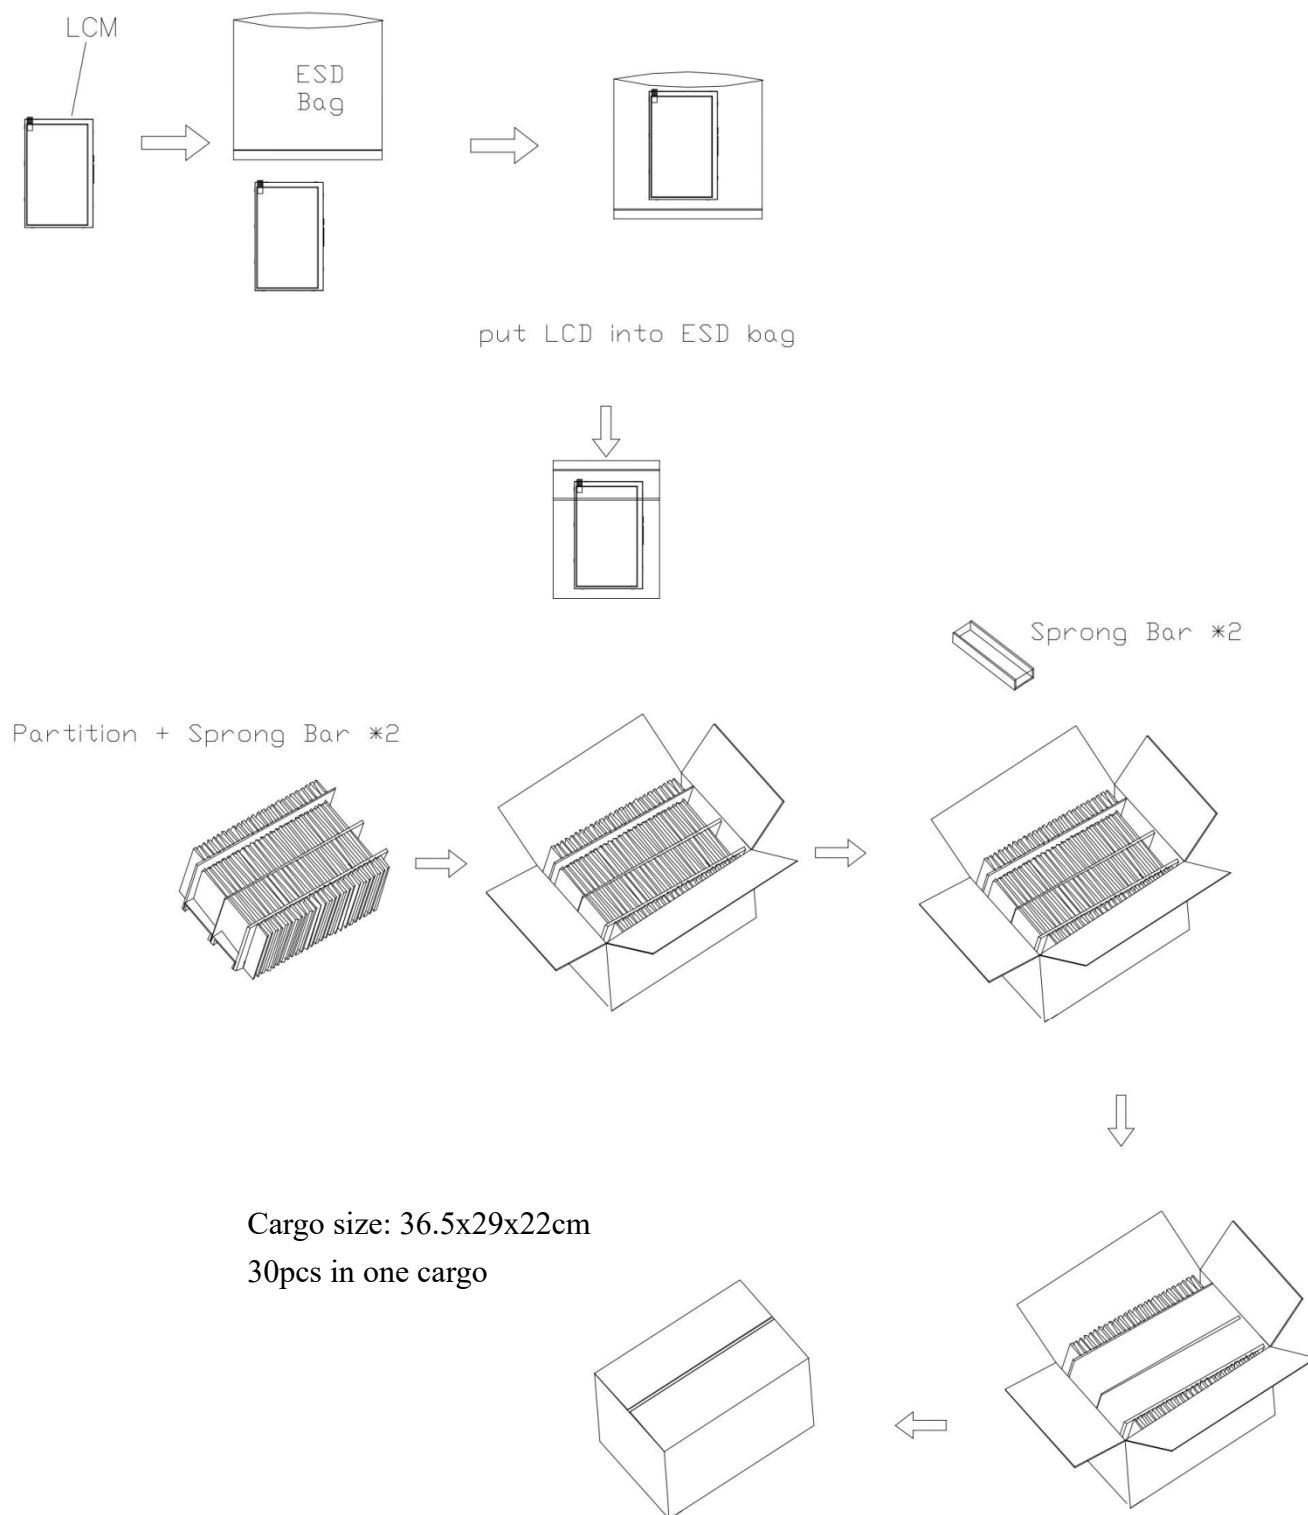

42cargos in one pallet, pallet size : 80x120cm

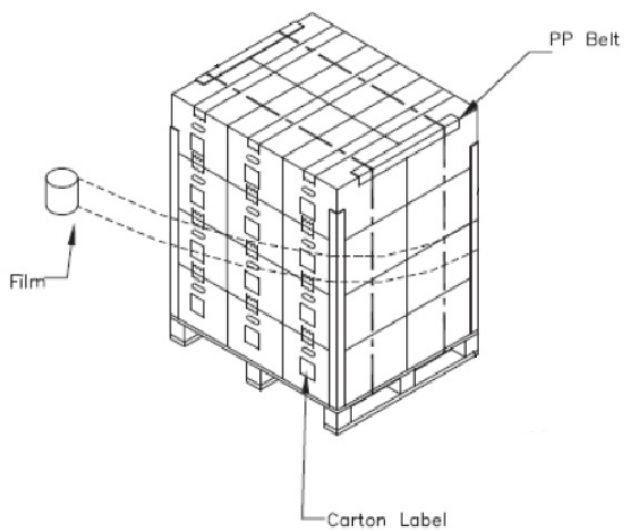

9.3 Carton label:

Label size: 90mmx80mm

HL 海罗光电出货标签
Hello Lighting Shipping label

订单号 PO No:	
客户料号: Customer PN:	
型号: PN:	
规格: Type	
数量: Quantity	
毛重: Weight:	
日期: Date:	

10. STANDARD SPECIFICATION FOR RELIABILITY:

Item	Condition		Time (hrs)	Assessment
High temp. Storage	85°C		120	No abnormalities in functions and appearance
High temp. Operating	85°C		120	
Low temp. Storage	-30°C		120	
Low temp. Operating	-30°C		120	
Humidity	40°C/ 90%RH		120	
Thermal Shock Temp. Cycle	-30°C ← →85°C (0.5hour ← → 0.5 hour)		10cycles	
ESD Testing	HBM:	±6KV		330Ω/150PF
	MM:	±100V		200PF/0Ω

Functions, performance, appearance, etc. shall be free from remarkable deterioration within 50,000 hours under ordinary operating and storage conditions room temperature ($25\pm10^{\circ}\text{C}$), normal humidity ($45\pm20\%$ RH), and in area not exposed to direct sun light. (Life time of backlight, please refer to Data about backlight.)

Testing Conditions and Inspection Criteria:

For the final test the testing sample must be stored at room temperature for 24 hours, after the tests listed in up Table, Standard specifications for Reliability have been executed in order to ensure stability.

Item	Test Model	In section Criteria
Current Consumption	Refer To Specification	The current consumption should conform to the product specification.
Contrast	Refer To Specification	After the tests have been executed, the contrast must be larger than half of its initial value prior to the tests.
Appearance	Visual inspection	Defect free.

11.SPECIFICATION OF QUALITY ASSURANCE:

11.1 Purpose

This standard for Quality Assurance should affirm the quality of LCD Module products to supply.

11.2 Standard for Quality Test

a. Inspection:

Before delivering, the supplier should take the following tests, and affirm the quality of product.

b. Electro-Optical Characteristics:

According to the individual specification to test the product.

c. Test of Appearance Characteristics:

According to the individual specification to test the product.

d. Test of Reliability Characteristics:

According to the definition of reliability on the specification for testing products.

e. Delivery Test:

Before delivering, the supplier should take the delivery test.

(i) Test method: According to MIL-STD105E.General Inspection Level II take a single time.

(ii) The defects classify of AQL as following:

Major defect: AQL = 0.65

Minor defect: AQL = 2.5

Total defects: AQL = 2.5

11.3. Nonconforming Analysis & Deal With Manners

a. Nonconforming Analysis:

(i) Purchaser should supply the detail data of non- conforming sample and the non- conforming.

(ii) After accepting the detail data from purchaser, the analysis of nonconforming should be finished in two weeks.

(iii) If supplier can not finish analysis on time, must announce purchaser before two weeks.

b. Disposition of nonconforming:

(i) If find any product defect of supplier during assembly time, supplier must change the good product for every defect after recognition.

(ii) Both supplier and customer should analyze the reason and discuss the disposition of nonconforming when the reason of nonconforming is not sure.

11.4. Agreement items

Both sides should discuss together when the following problems happen.

a. There is any problem of standard of quality assurance, and both sides think that it must be modified.

b. There is any argument item which does not record in the standard of quality assurance.



c. Any other special problem.

11.5 Standard of The Product Appearance Test

a. Manner of appearance test: This specification should be applied for both light on and off situation.

(i) The test must be under 20W × 2 or 40W fluorescent light, and the distance of view must be at 30±5cm.

- (ii) When test the model of transmissive product must add the reflective plate.
- (iii) The test direction is base on about around 10° of vertical line (Left graph)
- (iii) Temperature: $25 \pm 5^\circ\text{C}$ Humidity: $65 \pm 10\%\text{RH}$

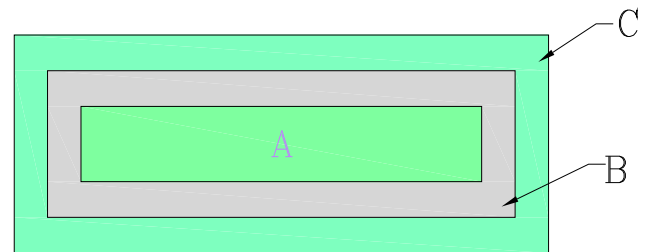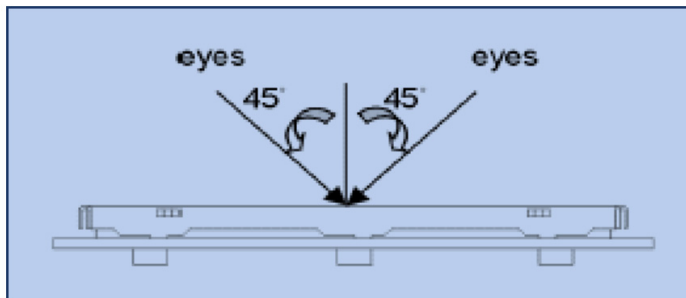

(iv) Definition of area (Right graph)

A. Area: Viewing area. B. Area: Out of viewing area.(Outside viewing area)

b. Basic principle:

- (i) It will accord to the AQL when the standard can not be described.
- (ii) The sample of the lowest acceptable quality level must be discussed by both supplier and customer when any dispute happened.
- (iii) Must add new item on time when it is necessary.

c. Standard of inspection: (Unit: mm)

Allowable limits defined in follow Dot defect Table should be met for each white, black , R, G, B raster. The limits apply to the entire area. Missing white in 60% or more of typical (one color, R or G or B) pixel aperture is defined as a bright defect, less than 60% is acceptable .Black spot in 60% or more of typical pixel aperture is defined as a dark defect, less than 60% is acceptable.

Dot defect table:

Item		White dot defect	Black dot defect	Total
1	Defect counts	3	3	3
2	Combined defect Counts	No combined dot defect allowed. Two Single dot defect that within 5mm during each dot defect should becounated as combined dot defect.		



11.6 Inspection specification

AQL inspection standard



Sampling method: MIL-STD-105E, Level II, single sampling

Classify	Item		Note	AQL	
Major	Display state	Short or open circuit	1	0.65	
		Contrast defect (dim, ghost)			
		LC leakage			
		Flickering			
		No display			
		Wrong viewing direction	2		
		Wrong Back-light	7		
	Non-display	Flat cable or pin reverse	9		
		Wrong or missing component	10		
Minor	Display state	Background color deviation	2	2.5	
		Black spot and dust	3		
		Line defect	4		
		Scratch			
		Rainbow	5		
		Pin hole	6		
	Polarizer	Bubble and foreign material	3		
		Scratch	4		
	PCB,FPC	Scratch	4		
	Soldering	Poor connection	8		
	Wire	Poor connection	9		
	LCD	CHIP OUT	11		
	SMT		12		
	Mura		13		
	Light leakage		14		

Note on defect classification:

No.	Item	Criterion																				
1	Short or open circuit	Not allow																				
	LC leakage																					
	Flickering																					
	No display																					
	Wrong viewing direction																					
	Wrong Back-light																					
2	Contrast defect	Refer to approval sample																				
	Background color deviation																					
3	Point defect, Black spot, dust (incl. Polarizer) ex.: dirt under polarizer, Pinhole of reflector ,glass scratch, dirt under glass,scratch on polarizer $\phi = (X+Y)/2$	 <table><tr><td>Point</td><td>Acceptable Qty.</td></tr><tr><td>Size</td><td></td></tr><tr><td>$\phi \leq 0.20$</td><td>Disregard</td></tr><tr><td>$0.20 < \phi \leq 0.25$</td><td>3</td></tr><tr><td>$0.25 < \phi \leq 0.30$</td><td>2</td></tr><tr><td>$\phi > 0.30$</td><td>0</td></tr></table> Unit: mm	Point	Acceptable Qty.	Size		$\phi \leq 0.20$	Disregard	$0.20 < \phi \leq 0.25$	3	$0.25 < \phi \leq 0.30$	2	$\phi > 0.30$	0								
	Point	Acceptable Qty.																				
Size																						
$\phi \leq 0.20$	Disregard																					
$0.20 < \phi \leq 0.25$	3																					
$0.25 < \phi \leq 0.30$	2																					
$\phi > 0.30$	0																					
4	Line defect	 <table><tr><td></td><td>Line</td><td>Acceptable Qty.</td></tr><tr><td>L</td><td>W</td><td></td></tr><tr><td>---</td><td>$0.015 \geq W$</td><td>Disregard</td></tr><tr><td>$3.0 \geq L$</td><td>$0.03 \geq W$</td><td rowspan="2">2</td></tr><tr><td>$2.0 \geq L$</td><td>$0.05 \geq W$</td></tr><tr><td>$1.0 \geq L$</td><td>$0.1 > W$</td><td>1</td></tr><tr><td>---</td><td>$0.05 < W$</td><td>Applied as point defect</td></tr></table> Unit: mm		Line	Acceptable Qty.	L	W		---	$0.015 \geq W$	Disregard	$3.0 \geq L$	$0.03 \geq W$	2	$2.0 \geq L$	$0.05 \geq W$	$1.0 \geq L$	$0.1 > W$	1	---	$0.05 < W$	Applied as point defect
		Line	Acceptable Qty.																			
L	W																					
---	$0.015 \geq W$	Disregard																				
$3.0 \geq L$	$0.03 \geq W$	2																				
$2.0 \geq L$	$0.05 \geq W$																					
$1.0 \geq L$	$0.1 > W$	1																				
---	$0.05 < W$	Applied as point defect																				
5	Rainbow	Not more than two color changes across the viewing area																				





No.	Item	Criterion
-----	------	-----------

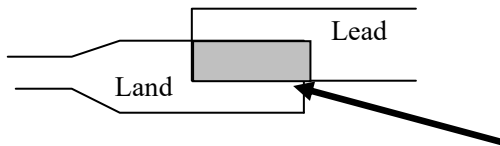6	Segment pattern W = Segment width $\phi = (X+Y)/2$	(1) Pin hole $\phi < 0.10\text{mm}$ is acceptable.  <table border="1"> <tr> <th>Point Size</th> <th>Acceptable Qty</th> </tr> <tr> <td>$\phi \leq 1/4W$</td> <td>Disregard</td> </tr> <tr> <td>$1/4W < \phi \leq 1/2W$</td> <td>1</td> </tr> <tr> <td>$\phi > 1/2W$</td> <td>0</td> </tr> </table> Unit: mm	Point Size	Acceptable Qty	$\phi \leq 1/4W$	Disregard	$1/4W < \phi \leq 1/2W$	1	$\phi > 1/2W$	0
Point Size	Acceptable Qty									
$\phi \leq 1/4W$	Disregard									
$1/4W < \phi \leq 1/2W$	1									
$\phi > 1/2W$	0									
7	Back-light	(1) The color of backlight should correspond its specification. (2) Not allow flickering								
8	Soldering	(1) Not allow heavy dirty and solder ball on PCB or FPC. (The size of dirty refer to point and dust defect) (2) Over 50% of lead should be soldered on Land. 								
9	Wire	(1) Copper wire should not be rusted (2) Not allow crack on copper wire connection. (3) Not allow reversing the position of the flat cable. (4) Not allow exposed copper wire inside the flat cable.								
10	PCB,FPC	(1) Not allow screw rust or damage. (2) Not allow missing or wrong putting of component.								

11

LCD


2.1.1 chip on the surface

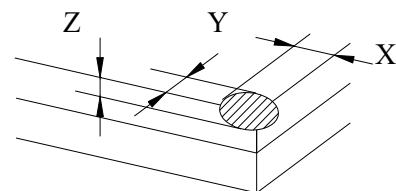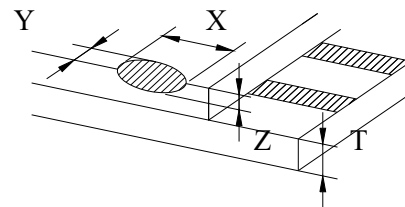

Note: A: LCD Length

X	Y	Z
$>1/8A$	$\leq 0.3\text{mm}$	$\leq 1/2T$
$\leq 1/8A$	Not enter into epoxy frame	$\leq T$
	Not enter into the inner edge of epoxy	$\leq 1/2T$

2.1.2 Chip on the terminal

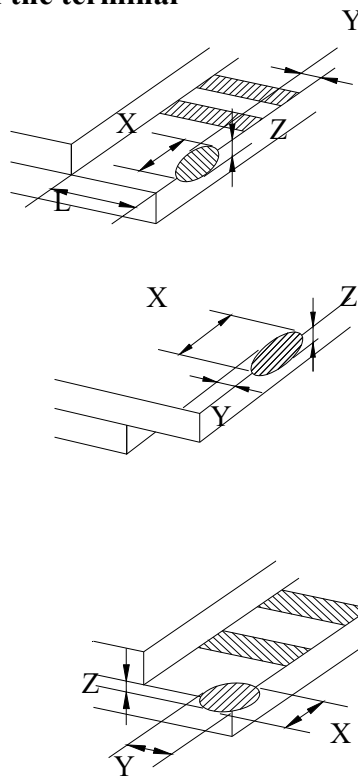


X	Y	Z
$>1/8A$	$\leq 0.3\text{mm}$	$\leq 1/2T$
$\leq 1/8A$	$\leq 1/2L$	$\leq T$
$\leq 1/8A \& \leq 1\text{mm}$	$\leq L$	$\leq T$
$\leq 1/8A \& \leq 2\text{mm}$	$\leq L$	$\leq 1/2T$

Note: A: LCD Length.



the distance between crack and contact pad must be greater than the width of 1st contact pad.

2.1.3 Chip out on between side

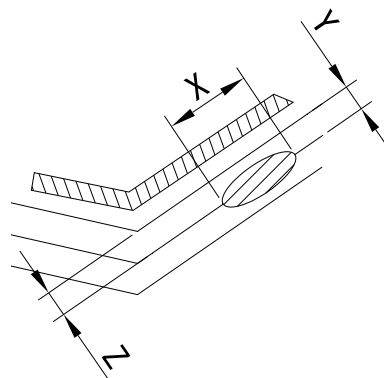

11


LCD



X	Y	Z
$\leq 1/8A$	Not enter into epoxy frame	$Z \leq 2T$
	Not enter into 1/2 epoxy frame	$Z \leq 1/2T$

Note: A : LCD Length



2.1.4 including corner chip and side chip

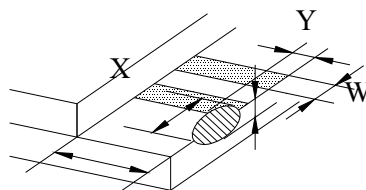

L

Note: A:LCD Length

X	Y	Z
$>1/8A$	$\leq 1/6L$	$\leq 1/2T$
$\leq 1/8A$	$\leq 1/3L$	
$\leq 1/4W$	$\leq 2/3L$	

11	LCD	2.2 Chip out  1) Chip out is that crackles extend to inner edge. 2) Crackles round epoxy frame will be rejected. 3) Chip out on the terminal will be rejected: $Z=T$ length $>1\text{mm}$ or $Z<T$ length $>2\text{mm}$ 4) The chip out at ITO will be rejected.							
		2.3 Poor cutting  <table border="1"> <thead> <tr> <th>X</th><th>Y</th><th>Z</th></tr> </thead> <tbody> <tr> <td>$>1/8$ A</td><td>≤ 0.3</td><td>$\leq 1/2T$</td></tr> <tr> <td>$\leq 1/8$ A</td><td>According to drawing</td><td>$1/2T \leq Z \leq T$</td></tr> </tbody> </table> Note : A: LCD Length.	X	Y	Z	$>1/8$ A	≤ 0.3	$\leq 1/2T$	$\leq 1/8$ A
X	Y	Z							
$>1/8$ A	≤ 0.3	$\leq 1/2T$							
$\leq 1/8$ A	According to drawing	$1/2T \leq Z \leq T$							
12	SMT	According to the <Acceptable of electronic assemblies> IPC-A-610C class 2 stander. Component missing or function defect are Major defect ,the others are Minor defect.							
13	MURA	Not visible through 6% ND filter in 50% gray							
14	Light leakage	under black screen, light leakage should $\leq 4\text{nits}$							
Any one out of the specification will be rejected.									

12. GENERAL PRECAUTIONS

(1) Mounting Method

The panel of the LCD Module consists of two thin glass plates with polarizers which easily get damaged since the Module is fixed by utilizing fitting holes in the printed circuit board. Extreme care should be taken when handling the LCD Modules.

(2) Caution of LCD handling & cleaning

When cleaning the display surface, use soft cloth with solvent (recommended below) and wipe lightly.

- Isopropyl alcohol
- Ethyl alcohol
- Trichlorotrifluoroethane

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface. Do not use the following solvent:

- Water
- Ketone
- Aromatics

(3) Caution against static charge

The LCD Module use C-MOS LSI drivers, so we recommend that you connect any unused input terminal to VDD or VSS, do not input any signals before power is turned on. And ground your body, Work/assembly table. And assembly equipment to protect against static electricity.

(4) Packaging

Modules use LCD elements, and must be treated as such. Avoid intense shock and falls from a height.

- To prevent modules from degradation. Do not operate or store them exposed directly to sunshine or high temperature/humidity.

(5) Caution for operation

- It is indispensable to drive LCD's within the specified voltage limit since the higher voltage than the limit shorten LCD life. An electrochemical reaction due to direct current causes LCD deterioration, Avoid the use of direct current drive.
- Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark color in them.

However those phenomena do not mean malfunction or out of order with LCD's which will come back in the specified operating temperature range.

- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- As light dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal

open circuit.

Usage under the relative condition of 40°C, 50%RH or less is required.

(6) Storage

In the case of storing for a long period of time (for instance, for years) for the purpose or replacement use, The following ways are recommended.

- Storage in a polyethylene bag with sealed so as not to enter fresh air outside in it, And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light is.

Keeping temperature in the specified storage temperature range.

- Storing with no touch on polarizer surface by the anything else. (It is recommended to store them as they have been contained in the inner container at the time of delivery)

(7) Safety

- It is recommendable to crash damaged or unnecessary LCD into pieces and wash off liquid crystal by using solvents such as acetone and ethanol which should be burned up later.
- When any liquid crystal leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water.

Hello Lighting co., ltd reserves the right to change this specification.
www.hello-lighting.com
- END -